
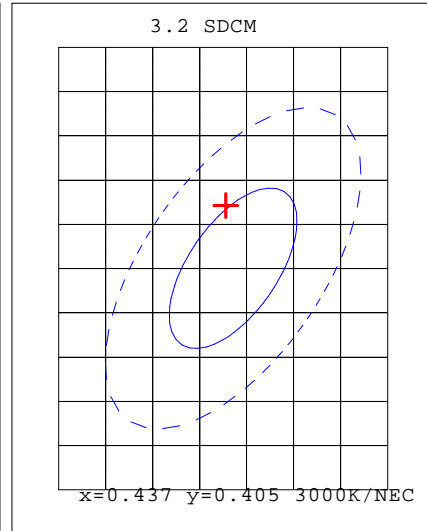


Light Source Test Report

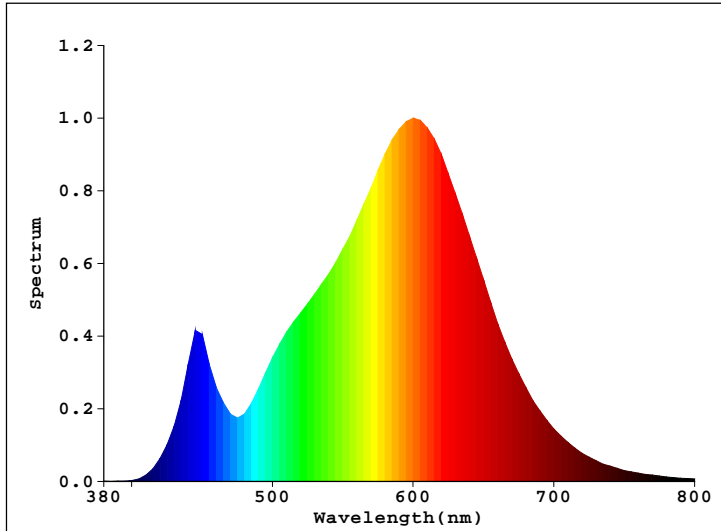

Color Parameters:

Chromaticity Coordinate: $x=0.4363$ $y=0.4107$ / $u'=0.2474$ $v'=0.5239$
 Tc=3063K Dominant WL:Ld=581.6nm Purity=54.2% Centroid WL:587.0nm
 Ratio:R=23.7% G=74.2% B=2.2% Peak WL:Lp=600.0nm HWL:127.4nm
 Render Index:Ra=80.2
 R1 =77 R2 =88 R3 =97 R4 =78 R5 =78 R6 =85 R7 =83
 R8 =56 R9 =-4 R10=73 R11=77 R12=69 R13=79 R14=99 R15=69

Photo Parameters:

Flux: 437.58 lm Fe: 1.3008 W Efficacy:58.51 lm/W
 LEVEL: WHITE:ANSI_3000K

Electrical Parameters:

Luminaire: U=229.2V I=0.03284A P=7.479W PF=0.9927

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=16037(G=5,D=53)
 REF=39951(R=4) %=-0.226% PMT: 31.4 centigrade [150.0]

1769B-Q5 EDC38C-8W-830-230V

Product Type:GUNNSY AC LED OUTDOOR LIGHTING Manufacturer:CG LIGHTING
 Number:2 Test Department:
 Temperature:25.3 deg Humidity:65.0%
 Test Operator:Li Qingli Test Date:2018-06-29 20:55:12
 Software:V2.00.100 Instrument:PMS-80_V1 (SN:1011026)