
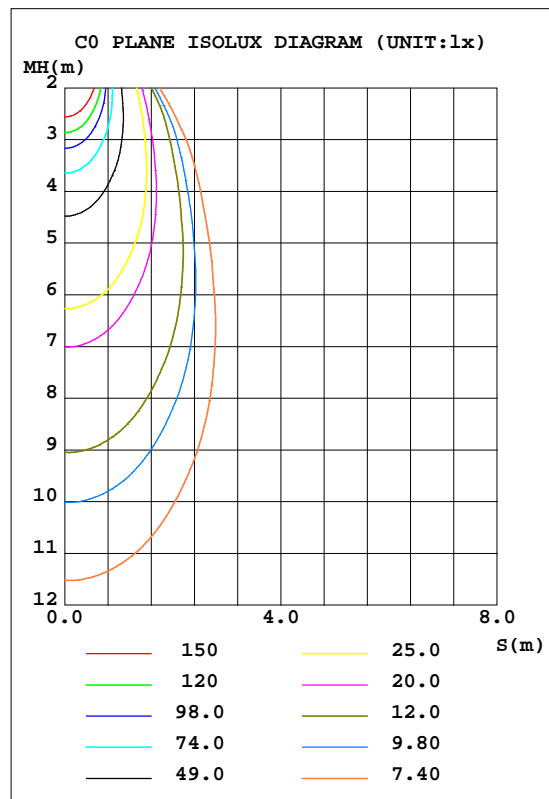


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.32V I:0.0441A P:9.0299W PF:0.8874 Freq:49.99Hz Lamp Flux:616.627x1 lm		
NAME: Milan remote driver +flash canopy 7.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	N1718A-5R	Imax(cd)	983.2	S/MH(C0/180)	0.65
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.65
RATED VOLTAGE(V)	230.0	TOTAL FLUX(lm)	616.63	h UP, DN(C0-180)	0.0,49.9
NOMINAL FLUX(lm)	616.627	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,50.1
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	230.0	h down(%)	100.0	CIBSE SHR MAX	0.70

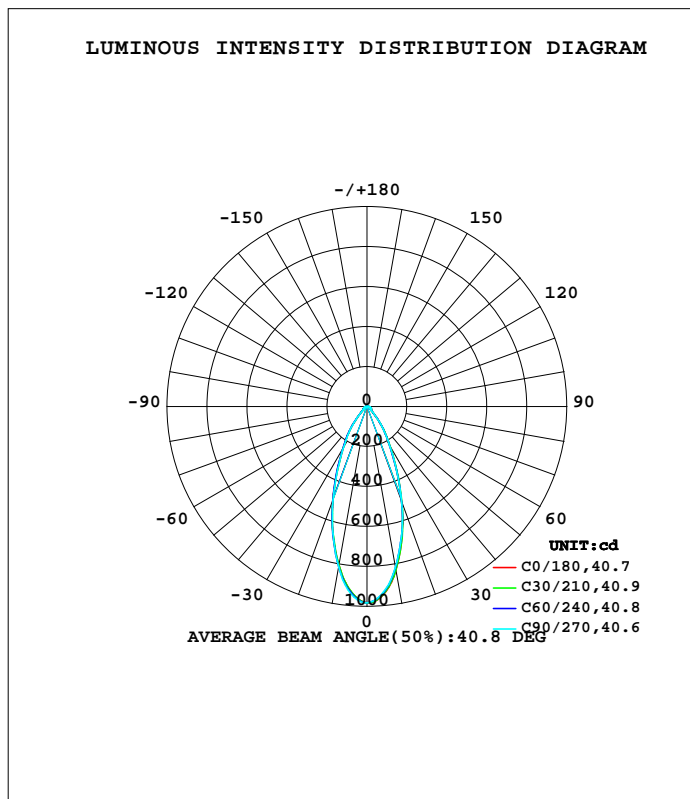

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LQL  
 Test Date:12 March 2018

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.403  
 Humidity:65.0%  
 Test Distance:10.320m [K=1.0000]  
 Remarks: ZG1 BGE30KH0 LIC9W500 UNI

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	832.3	827.0	819.9	809.5	809.1	813.3	817.1	829.8	0- 10	85.68	85.68	13.9,13.9
20	506.5	507.4	506.7	503.5	501.1	497.9	497.7	506.3	10- 20	183.8	269.4	43.7,43.7
30	231.4	230.6	233.6	233.2	237.5	239.6	235.5	231.9	20- 30	161.2	430.6	69.8,69.8
40	84.95	84.44	86.52	87.70	91.91	92.62	88.91	85.27	30- 40	97.34	528.0	85.6,85.6
50	25.29	25.64	25.58	26.26	27.00	27.17	25.56	25.02	40- 50	36.18	564.1	91.5,91.5
60	18.58	18.74	19.36	20.08	20.14	19.74	19.06	18.74	50- 60	19.77	583.9	94.7,94.7
70	13.63	13.78	14.25	14.72	14.73	14.34	13.94	13.67	60- 70	16.15	600.0	97.3,97.3
80	7.810	8.063	8.520	8.894	8.940	8.624	8.174	7.867	70- 80	12.31	612.4	99.3,99.3
90	0.0282	0.0282	0.0141	0.0317	0.0493	0.0423	0.0564	0.0564	80- 90	4.271	616.6	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LQL  
 Test Date:12 March 2018

g Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.403  
 Humidity:65.0%  
 Test Distance:10.320m [K=1.0000]  
 Remarks: ZG1 BGE30KH0 LIC9W500 UNI

LUMINANCE LIMITATION CURVES

Test:U:230.32V I:0.0441A P:9.0299W PF:0.8874 Freq:49.99Hz Lamp Flux:616.627x1 lm		
NAME: Milan remote driver +flash canopy 7.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

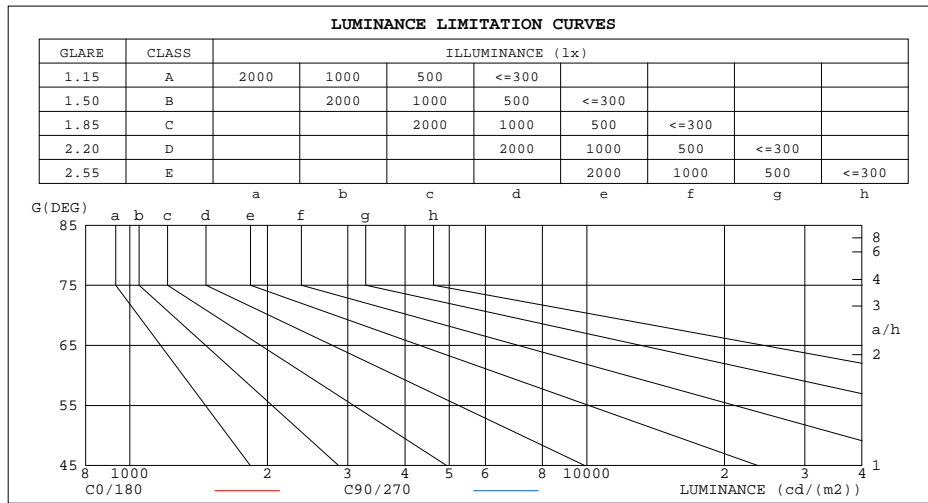

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	40	47
80	45	49
75	44	46
70	40	42
65	36	38
60	37	39
55	37	38
50	39	40
45	59	59


C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LQL  
 Test Date:12 March 2018

G Range: 0 - 90DEG  
 G Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.403  
 Humidity:65.0%  
 Test Distance:10.320m [K=1.0000]  
 Remarks: ZG1 BGE30KH0 LIC9W500 UNI

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.32V I:0.0441A P:9.0299W PF:0.8874 Freq:49.99Hz Lamp Flux:616.627x1 lm		
NAME: Milan remote driver +flash canopy 7.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.07	1.04	1.08	1.05	1.03	1.03	1.01	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.01	.97	.93	.00	.96	.92	.96	.93	.90	.93	.91	.88	.91	.88	.86	.85
3.0	.94	.89	.85	.93	.88	.84	.90	.86	.83	.88	.84	.81	.85	.83	.80	.79
4.0	.88	.82	.78	.87	.82	.77	.85	.80	.76	.83	.79	.76	.81	.77	.75	.73
5.0	.83	.77	.72	.82	.76	.72	.80	.75	.71	.78	.74	.70	.77	.73	.70	.68
6.0	.78	.72	.67	.77	.71	.67	.75	.70	.66	.74	.69	.66	.73	.69	.66	.64
7.0	.73	.67	.63	.73	.67	.63	.71	.66	.62	.70	.66	.62	.69	.65	.62	.60
8.0	.69	.63	.59	.69	.63	.59	.68	.62	.59	.67	.62	.59	.66	.61	.58	.57
9.0	.66	.60	.56	.65	.60	.56	.64	.59	.56	.63	.59	.55	.63	.58	.55	.54
10.0	.63	.57	.53	.62	.57	.53	.61	.56	.53	.61	.56	.53	.60	.56	.52	.51

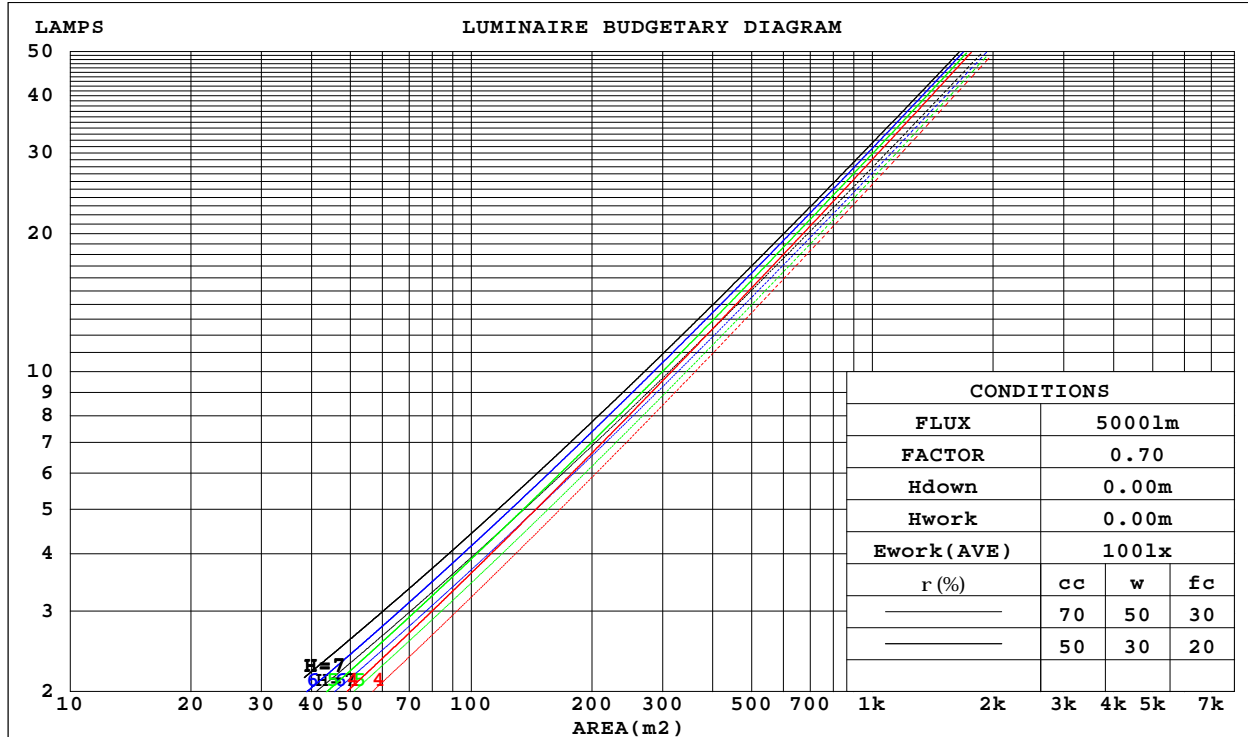

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LQL  
 Test Date:12 March 2018

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.403  
 Humidity:65.0%  
 Test Distance:10.320m [K=1.0000]  
 Remarks: ZG1 BGE30KH0 LIC9W500 UNI

WEC AND CCEC

Test:U:230.32V I:0.0441A P:9.0299W PF:0.8874 Freq:49.99Hz Lamp Flux:616.627x1 lm		
NAME: Milan remote driver +flash canopy 7.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.198	.113	.036	.192	.109	.035	.179	.103	.033	.167	.097	.031	.157	.091	.029	
2.0	.186	.102	.031	.180	.099	.031	.170	.094	.029	.160	.090	.028	.151	.085	.027	
3.0	.174	.093	.028	.169	.091	.027	.160	.087	.026	.152	.083	.025	.144	.080	.025	
4.0	.163	.085	.025	.159	.083	.025	.151	.080	.024	.144	.077	.023	.137	.074	.023	
5.0	.154	.078	.023	.150	.077	.022	.143	.075	.022	.137	.072	.021	.131	.070	.021	
6.0	.145	.073	.021	.142	.072	.021	.136	.070	.020	.130	.068	.020	.125	.066	.020	
7.0	.138	.068	.019	.135	.067	.019	.129	.065	.019	.124	.064	.019	.120	.062	.018	
8.0	.131	.064	.018	.128	.063	.018	.124	.062	.018	.119	.060	.017	.115	.059	.017	
9.0	.125	.060	.017	.122	.060	.017	.118	.058	.017	.114	.057	.016	.110	.056	.016	
10.0	.119	.057	.016	.117	.056	.016	.113	.055	.016	.109	.054	.015	.106	.053	.015	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.173	.157	.143	.148	.135	.123	.101	.093	.085	.058	.054	.050	.019	.017	.016	
2.0	.158	.132	.111	.135	.114	.096	.093	.079	.067	.054	.046	.039	.017	.015	.013	
3.0	.146	.114	.088	.125	.098	.076	.086	.068	.053	.050	.040	.031	.016	.013	.010	
4.0	.136	.099	.071	.116	.086	.062	.080	.060	.043	.046	.035	.026	.015	.011	.008	
5.0	.127	.088	.059	.109	.076	.051	.075	.053	.036	.043	.031	.021	.014	.010	.007	
6.0	.119	.078	.049	.102	.068	.043	.071	.047	.030	.041	.028	.018	.013	.009	.006	
7.0	.112	.071	.042	.097	.061	.036	.067	.043	.026	.039	.025	.015	.013	.008	.005	
8.0	.106	.064	.036	.092	.056	.031	.063	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.101	.059	.031	.087	.051	.027	.060	.036	.019	.035	.021	.011	.011	.007	.004	
10.0	.096	.055	.027	.083	.048	.024	.057	.033	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LQL  
 Test Date:12 March 2018

g Range: 0 - 90DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.403  
 Humidity:65.0%  
 Test Distance:10.320m [K=1.0000]  
 Remarks: ZG1 BGE30KH0 LIC9W500 UNI

UGR(Unified Glare Rating) Table

Test:U:230.32V I:0.0441A P:9.0299W PF:0.8874 Freq:49.99Hz Lamp Flux:616.627x1 lm										
NAME: Milan remote driver +flash canopy 7.5W					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: CG LIGHTING					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	0.4	1.3	0.6	1.5	1.7	0.4	1.4	0.6	1.5	1.7
3H	1.3	2.2	1.5	2.4	2.6	1.3	2.3	1.6	2.5	2.7
4H	1.9	2.8	2.2	3.0	3.2	2.0	2.9	2.3	3.1	3.3
6H	2.5	3.3	2.8	3.6	3.8	2.7	3.5	3.0	3.7	4.0
8H	2.7	3.5	3.1	3.8	4.1	2.9	3.7	3.3	4.0	4.2
12H	2.9	3.6	3.2	3.9	4.2	3.1	3.9	3.4	4.2	4.4
4H 2H	0.6	1.5	0.9	1.7	1.9	0.6	1.5	0.9	1.7	1.9
3H	1.8	2.6	2.2	2.9	3.1	1.9	2.7	2.2	2.9	3.2
4H	2.7	3.4	3.0	3.7	4.0	2.8	3.5	3.1	3.8	4.1
6H	3.5	4.1	3.8	4.4	4.8	3.6	4.2	4.0	4.6	4.9
8H	3.8	4.3	4.2	4.7	5.1	4.0	4.5	4.4	4.9	5.3
12H	4.0	4.5	4.4	4.9	5.3	4.2	4.7	4.6	5.1	5.5
8H 4H	3.0	3.6	3.4	3.9	4.3	3.1	3.7	3.5	4.0	4.4
6H	4.0	4.4	4.4	4.8	5.3	4.1	4.6	4.6	5.0	5.4
8H	4.4	4.8	4.8	5.2	5.7	4.6	5.0	5.0	5.4	5.9
12H	4.7	5.0	5.1	5.5	6.0	4.9	5.3	5.4	5.7	6.2
12H 4H	3.0	3.6	3.4	3.9	4.3	3.1	3.6	3.5	4.0	4.4
6H	4.1	4.5	4.5	4.9	5.3	4.2	4.6	4.7	5.1	5.5
8H	4.5	4.9	5.0	5.3	5.8	4.7	5.1	5.2	5.5	6.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.6					+ 0.6 / - 0.6				
1.5H	+ 1.5 / - 0.6					+ 1.4 / - 0.5				
2.0H	+ 0.3 / - 0.2					+ 0.3 / - 0.2				

CIE Pub.117, 616.6 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.7)

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LQL  
 Test Date:12 March 2018

g Range: 0 - 90DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.403  
 Humidity:65.0%  
 Test Distance:10.320m [K=1.0000]  
 Remarks: ZG1 BGE30KH0 LIC9W500 UNI

UTILIZATION FACTORS TABLE

Test:U:230.32V I:0.0441A P:9.0299W PF:0.8874 Freq:49.99Hz Lamp Flux:616.627x1 lm		
NAME: Milan remote driver +flash canopy 7.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	83	76	71	82	75	71	81	75	71	67
0.80	90	84	79	90	83	79	88	83	79	75
1.00	95	89	85	94	88	84	93	89	84	79
1.25	100	94	90	99	93	89	97	92	88	84
1.50	103	97	93	102	96	93	99	95	92	87
2.00	106	101	97	105	100	97	102	98	95	89
2.50	108	104	100	106	102	99	103	100	97	91
3.00	110	106	103	108	105	102	105	102	99	93
4.00	112	109	106	110	107	105	107	104	102	95
5.00	114	111	109	112	109	107	108	106	104	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LQL  
 Test Date:12 March 2018

g Range: 0 - 90DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.403  
 Humidity:65.0%  
 Test Distance:10.320m [K=1.0000]  
 Remarks: ZG1 BGE30KH0 LIC9W500 UNI

ISOCANDELA DIAGRAM

Test:U:230.32V I:0.0441A P:9.0299W PF:0.8874 Freq:49.99Hz Lamp Flux:616.627x1 lm		
NAME: Milan remote driver +flash canopy 7.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

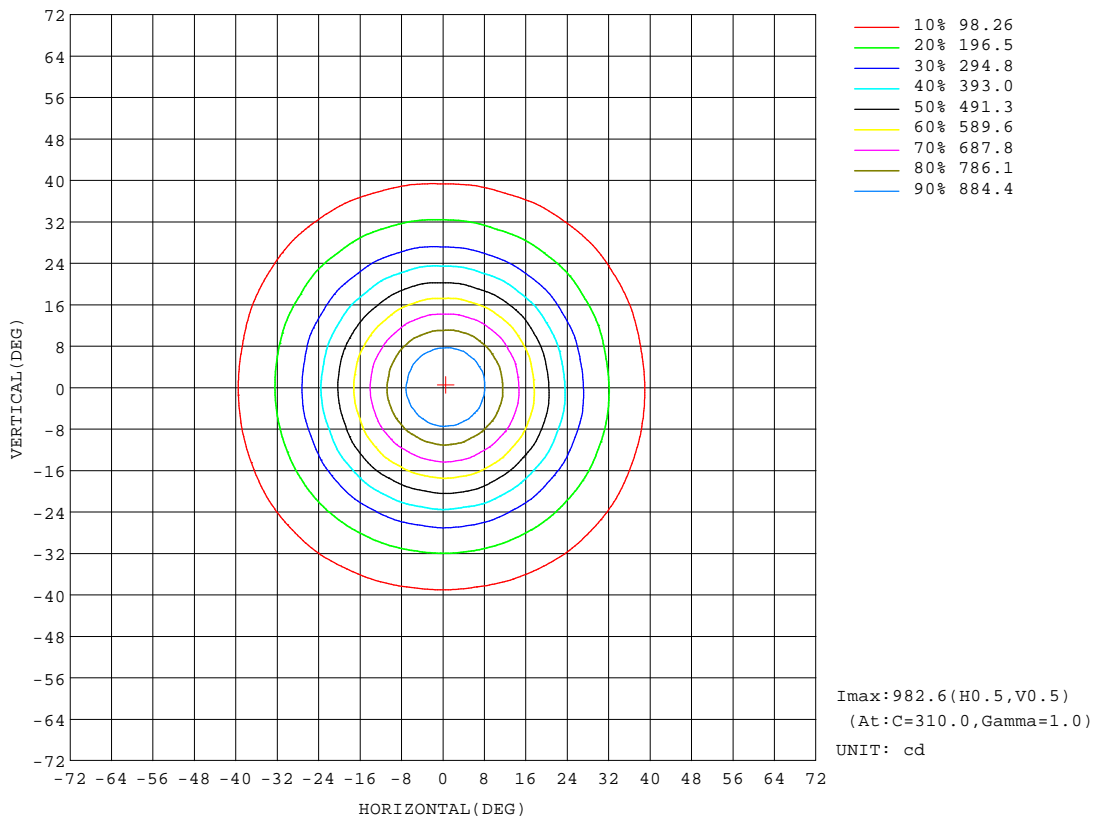


C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LQL  
 Test Date:12 March 2018

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.403  
 Humidity:65.0%  
 Test Distance:10.320m [K=1.0000]  
 Remarks: ZG1 BGE30KH0 LIC9W500 UNI



AAI CURVES

Test:U:230.32V I:0.0441A P:9.0299W PF:0.8874 Freq:49.99Hz Lamp Flux:616.627x1 lm		
NAME: Milan remote driver +flash canopy 7.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

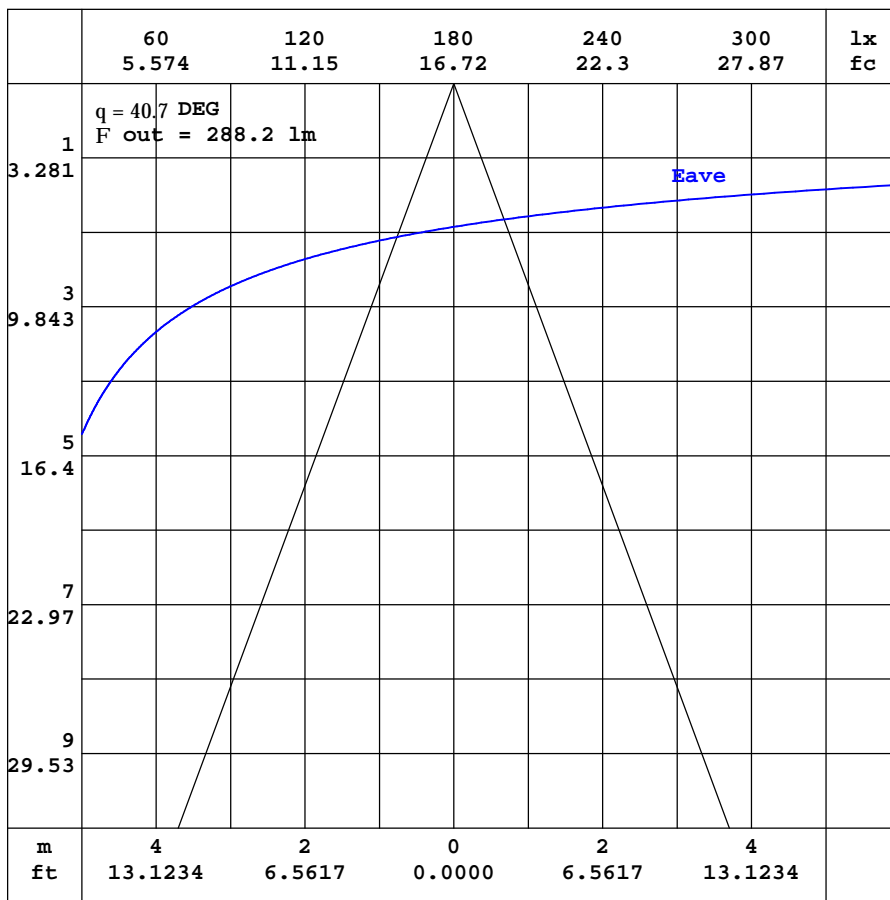


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LQL  
 Test Date:12 March 2018

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.403  
 Humidity:65.0%  
 Test Distance:10.320m [K=1.0000]  
 Remarks: ZG1 BGE30KH0 LIC9W500 UNI

**ISOLUX DIAGRAM**

Test:U:230.32V I:0.0441A P:9.0299W PF:0.8874 Freq:49.99Hz Lamp Flux:616.627x1 lm		
NAME: Milan remote driver +flash canopy 7.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

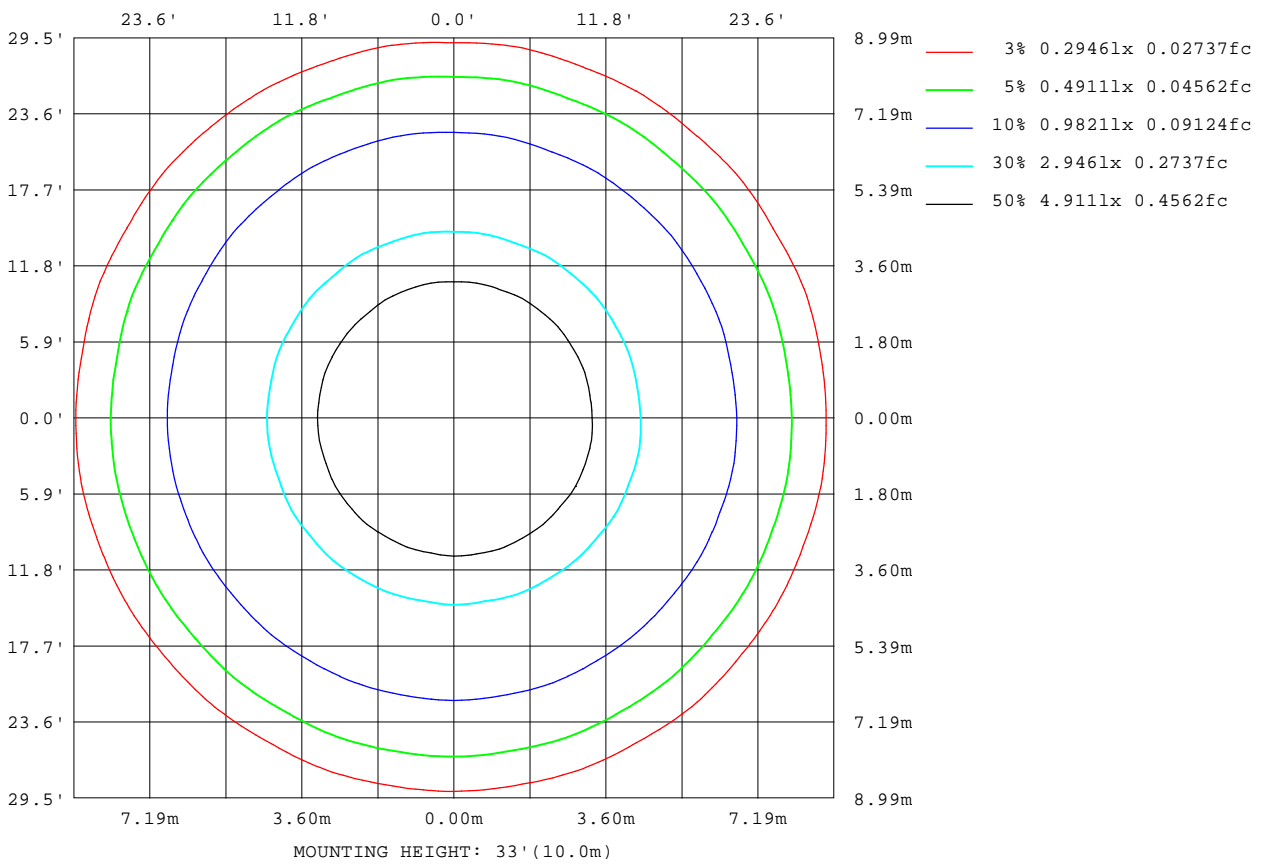

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LQL  
 Test Date:12 March 2018

Page Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.403  
 Humidity:65.0%  
 Test Distance:10.320m [K=1.0000]  
 Remarks: ZG1 BGE30KH0 LIC9W500 UNI

LED Avg.L Report

Test:U:230.32V I:0.0441A P:9.0299W PF:0.8874 Freq:49.99Hz Lamp Flux:616.627x1 lm		
NAME: Milan remote driver +flash canopy 7.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	38
L_0~180(75)av	46
L_0~180(85)av	45
L_90~270(65)av	38
L_90~270(75)av	46
L_90~270(85)av	45
L_45(65)av	38
L_45(75)av	46
L_45(85)av	45

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LQL  
 Test Date:12 March 2018

g Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.403  
 Humidity:65.0%  
 Test Distance:10.320m [K=1.0000]  
 Remarks: ZG1 BGE30KH0 LIC9W500 UNI

Planar Illuminance Curve

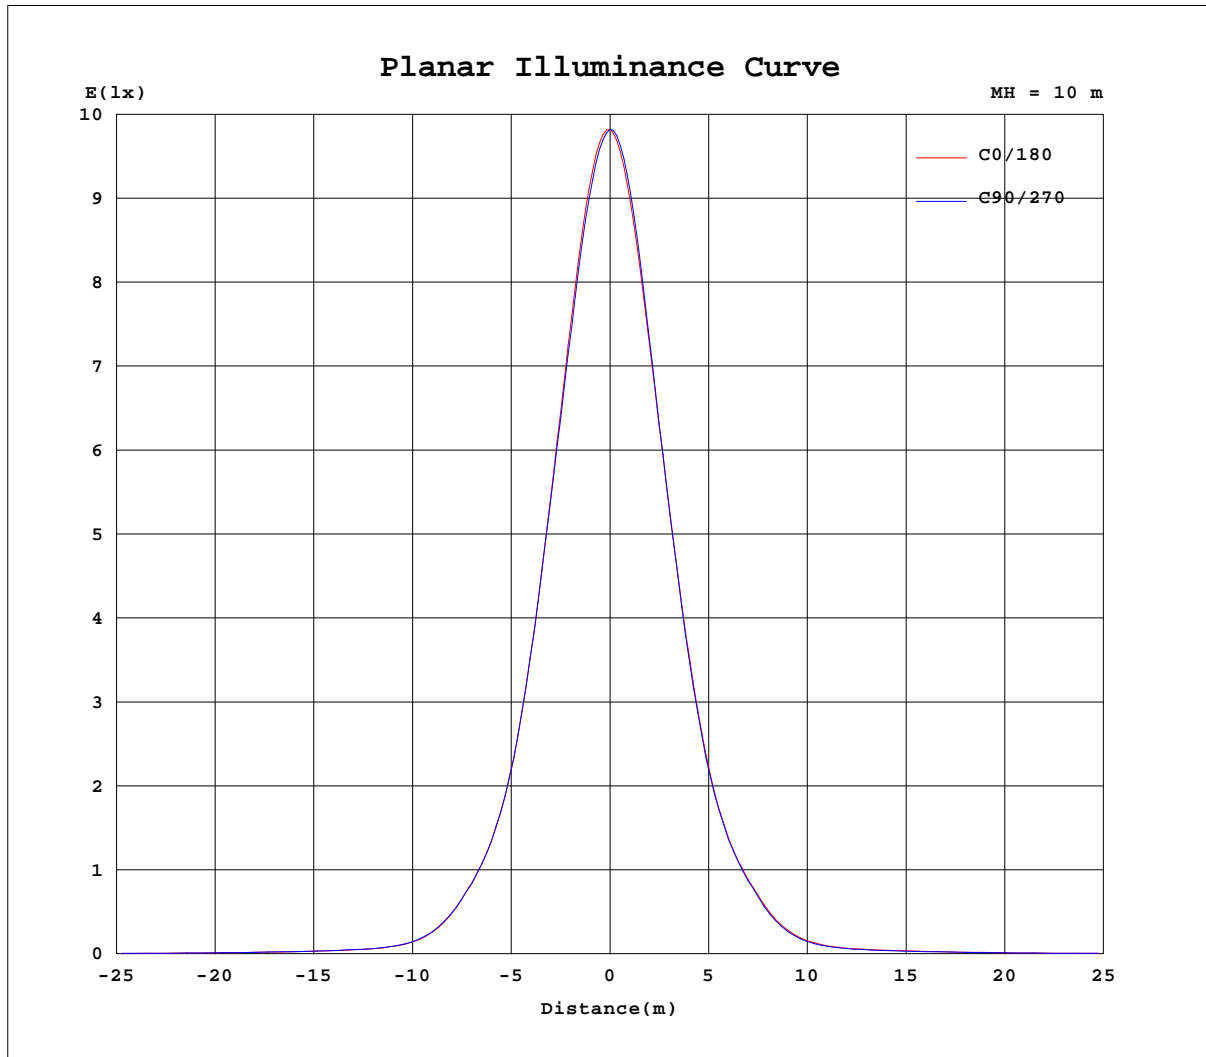

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: LQL  
 Test Date: 12 March 2018

Page Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.403  
 Humidity: 65.0%  
 Test Distance: 10.320m [K=1.0000]  
 Remarks: ZG1 BGE30KH0 LIC9W500 UNI



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.32V I:0.0441A P:9.0299W PF:0.8874 Freq:49.99Hz Lamp Flux:616.627x1 lm		
NAME: Milan remote driver +flash canopy 7.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C(DEG) g (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	982	981	982	982	982	981	982	982	982	981	982	982	982	982	982	982	983		
5	926	928	928	931	931	934	935	939	939	942	943	947	946	949	947	949	948		
10	807	809	809	813	814	816	813	818	817	824	825	830	828	831	830	835	833		
15	658	661	657	659	656	662	660	664	661	666	666	673	672	677	674	678	676		
20	500	503	500	500	496	501	501	503	498	501	495	504	504	509	504	507	503		
25	350	354	352	354	350	356	351	354	349	350	343	349	346	352	346	350	345		
30	236	240	238	242	237	242	238	240	236	234	230	233	230	233	229	232	229		
35	160	162	162	164	163	164	162	162	159	160	156	158	155	156	154	155	153		
40	90.3	93.1	92.1	93.5	91.7	93.4	90.8	91.6	88.9	89.4	85.6	87.6	84.5	86.1	84.3	85.2	83.6		
45	44.6	45.7	44.8	46.4	45.9	45.3	44.1	44.1	42.6	43.7	42.1	41.9	40.4	41.0	40.5	41.8	40.7		
50	27.0	27.2	27.1	27.3	27.0	26.8	26.3	26.2	25.6	25.7	25.2	25.2	24.9	25.1	25.0	25.3	25.0		
55	22.7	22.6	22.6	22.5	22.3	22.3	22.0	21.9	21.7	21.6	21.4	21.4	21.3	21.4	21.3	21.3	21.2		
60	20.0	19.9	19.9	19.8	19.6	19.6	19.3	19.2	19.1	19.0	18.9	18.9	18.7	18.7	18.6	18.6	18.5		
65	16.5	16.4	16.3	16.3	16.1	16.0	15.8	15.8	15.7	15.6	15.5	15.5	15.3	15.3	15.3	15.4	15.3		
70	14.6	14.6	14.5	14.4	14.3	14.2	14.1	14.1	13.9	13.9	13.8	13.8	13.7	13.7	13.6	13.7	13.6		
75	12.5	12.4	12.3	12.2	12.1	12.0	11.9	11.8	11.7	11.6	11.5	11.5	11.4	11.4	11.3	11.3	11.2		
80	8.84	8.85	8.72	8.70	8.55	8.55	8.37	8.35	8.17	8.13	8.02	8.00	7.86	7.87	7.77	7.81	7.74		
85	4.25	4.27	4.17	4.15	4.03	4.01	3.88	3.85	3.72	3.70	3.57	3.57	3.44	3.48	3.41	3.44	3.39		
90	0.06	0.04	0.06	0.04	0.04	0.05	0.05	0.05	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.06	0.05		

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LQL  
 Test Date:12 March 2018

g Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.403  
 Humidity:65.0%  
 Test Distance:10.320m [K=1.0000]  
 Remarks: ZG1 BGE30KH0 LIC9W500 UNI