
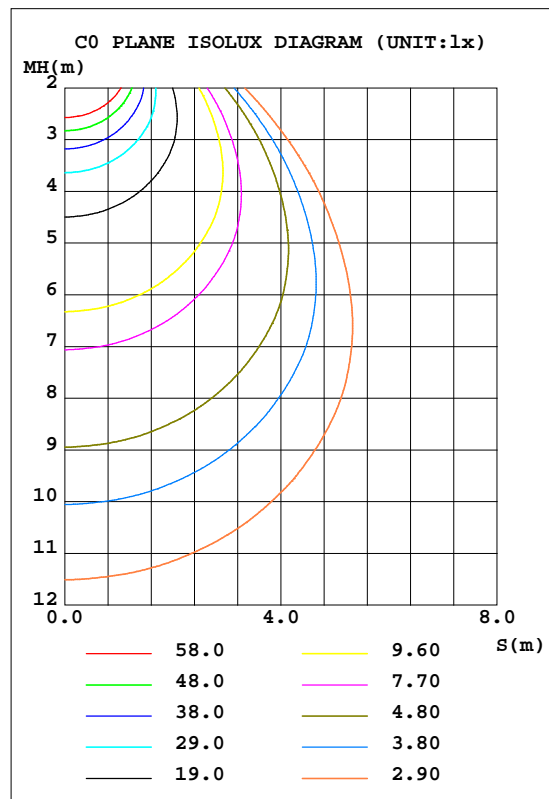


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.64V I:0.0442A P:9.1079W PF:0.8920 Freq:49.99Hz Lamp Flux:897.062x1 lm		
NAME: Cone shade 7.5W LED wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 98.49 lm/W
MODEL	2217C	I _{max} (cd)	394.3	S/MH(C0/180)	1.28	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.05	
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	897.06	h UP, DN(C0-180)	0.0,64.3	
NOMINAL FLUX(lm)	897.062	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,35.7	
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	230	h down(%)	100.0	CIBSE SHR MAX	1.35	

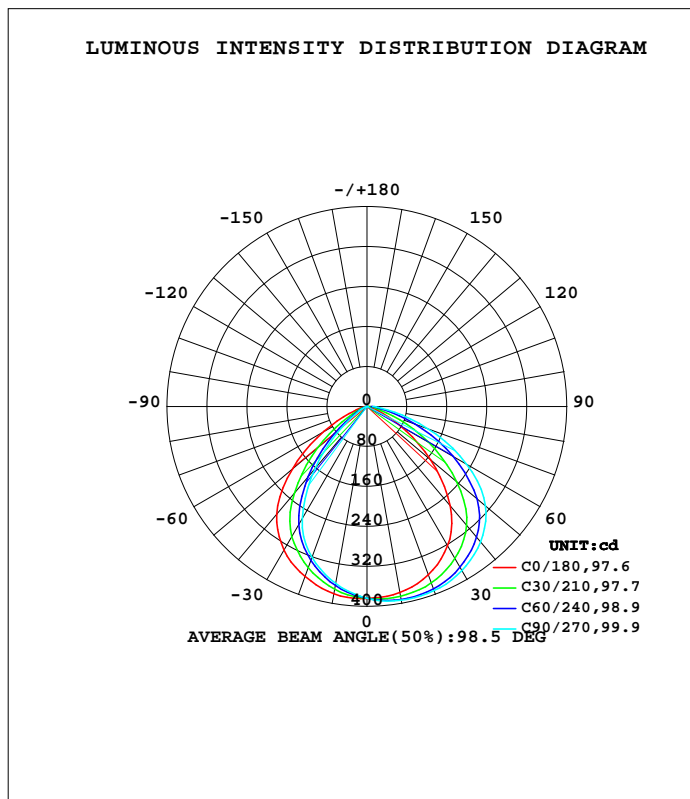

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:19 December 2022

Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=1.0000]
 Remarks: ZG1BME ACTEC MINI-10-500

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	378.2	389.2	393.8	391.0	380.7	367.5	359.9	365.4	0- 10	36.37	36.37	4.05,4.05
20	358.4	383.0	392.3	384.6	362.2	335.3	321.5	332.0	10- 20	104.4	140.8	15.7,15.7
30	322.5	362.8	379.2	367.1	332.2	286.1	259.0	277.7	20- 30	158.1	298.9	33.3,33.3
40	259.2	328.0	353.5	334.8	281.6	201.1	162.2	184.1	30- 40	184.6	483.5	53.9,53.9
50	166.4	263.9	309.6	284.3	195.4	105.2	67.36	89.69	40- 50	173.4	656.9	73.2,73.2
60	77.02	172.5	229.7	194.5	99.22	31.15	18.64	25.30	50- 60	128.9	785.8	87.6,87.6
70	21.72	79.79	129.2	97.09	28.39	8.727	3.910	7.345	60- 70	73.82	859.6	95.8,95.8
80	6.304	21.32	42.73	25.66	8.123	0.5829	0.6782	0.5499	70- 80	29.29	888.9	99.1,99.1
90	0.4131	6.240	12.06	7.469	0.4795	0.9110	1.320	1.033	80- 90	8.154	897.1	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:19 December 2022

g Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=1.0000]
 Remarks: ZG1BME ACTEC MINI-10-500

LUMINANCE LIMITATION CURVES

Test:U:230.64V I:0.0442A P:9.1079W PF:0.8920 Freq:49.99Hz Lamp Flux:897.062x1 lm		
NAME: Cone shade 7.5W LED wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

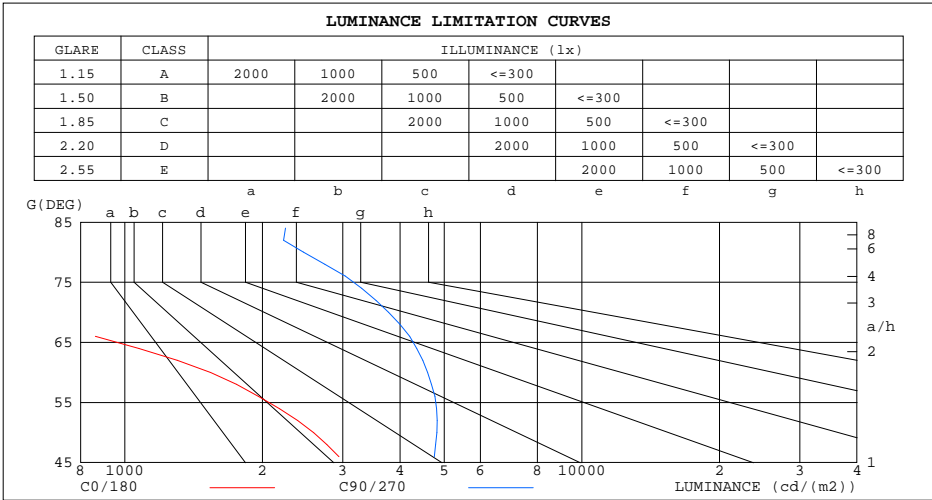

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	319	2694
80	363	2460
75	546	3514
70	635	3777
65	1114	4516
60	1540	4595
55	2232	4933
50	2589	4816
45	3158	4792


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:19 December 2022

G Range: 0 - 90DEG
 G Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=1.0000]
 Remarks: ZG1BME ACTEC MINI-10-500

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.64V I:0.0442A P:9.1079W PF:0.8920 Freq:49.99Hz Lamp Flux:897.062x1 lm		
NAME: Cone shade 7.5W LED wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.99	1.04	1.01	.97	.90	.97	.94	.96	.94	.92	.92	.91	.89	.87
2.0	.94	.88	.83	.92	.87	.82	.89	.84	.80	.86	.82	.78	.83	.79	.77	.75
3.0	.84	.76	.71	.82	.75	.70	.79	.74	.69	.77	.72	.68	.74	.70	.66	.64
4.0	.75	.67	.61	.74	.66	.60	.71	.65	.60	.69	.63	.59	.67	.62	.58	.56
5.0	.68	.59	.53	.66	.59	.53	.64	.58	.52	.62	.56	.52	.61	.55	.51	.49
6.0	.61	.53	.47	.60	.52	.47	.59	.51	.46	.57	.51	.46	.55	.50	.45	.44
7.0	.56	.47	.42	.55	.47	.42	.53	.46	.41	.52	.46	.41	.51	.45	.41	.39
8.0	.51	.43	.37	.50	.43	.37	.49	.42	.37	.48	.42	.37	.47	.41	.37	.35
9.0	.47	.39	.34	.46	.39	.34	.45	.38	.34	.44	.38	.33	.43	.37	.33	.32
10.0	.43	.36	.31	.43	.36	.31	.42	.35	.31	.41	.35	.30	.40	.34	.30	.29

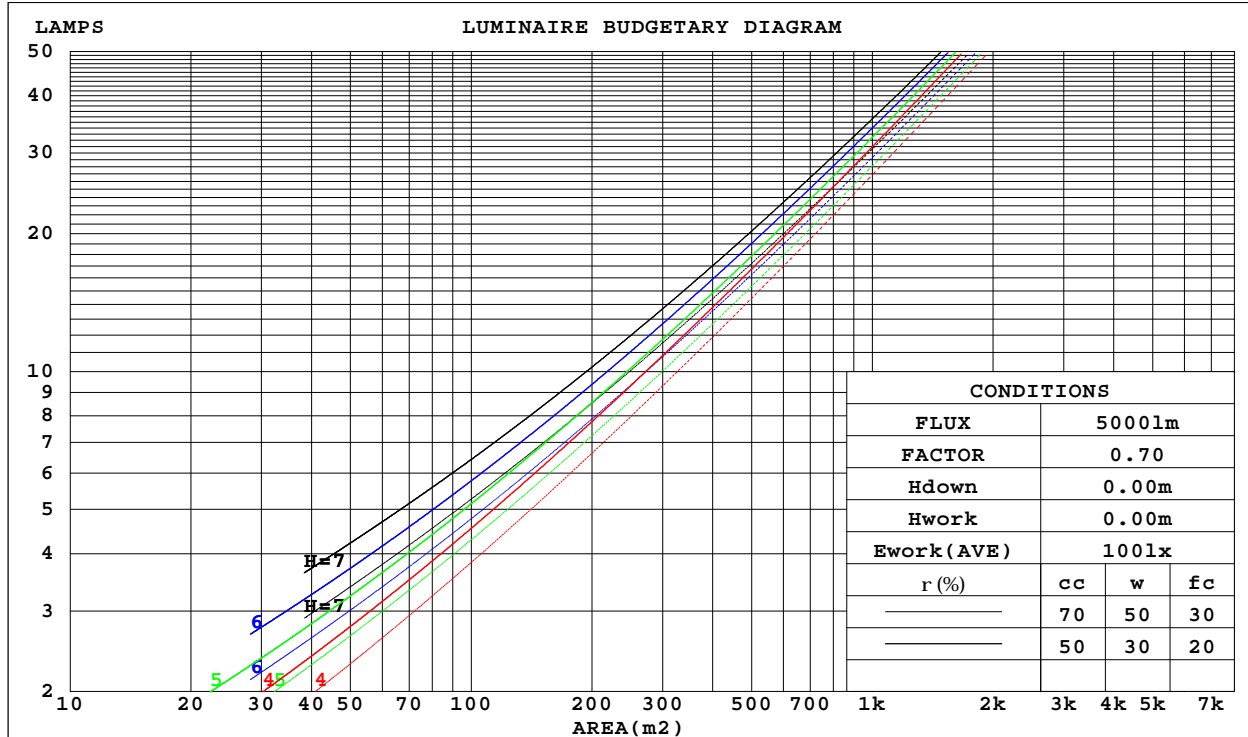

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:19 December 2022

Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=1.0000]
 Remarks: ZG1BME ACTEC MINI-10-500

WEC AND CCEC

Test:U:230.64V I:0.0442A P:9.1079W PF:0.8920 Freq:49.99Hz Lamp Flux:897.062x1 lm		
NAME: Cone shade 7.5W LED wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.266	.151	.048	.259	.148	.047	.246	.141	.045	.234	.135	.043	.223	.129	.042	
2.0	.256	.140	.043	.250	.138	.042	.239	.133	.041	.228	.128	.040	.219	.124	.039	
3.0	.242	.129	.039	.236	.127	.038	.226	.123	.037	.217	.119	.036	.208	.115	.036	
4.0	.226	.118	.035	.222	.116	.034	.213	.113	.034	.205	.110	.033	.197	.107	.033	
5.0	.212	.108	.031	.208	.107	.031	.200	.104	.031	.193	.102	.030	.186	.099	.030	
6.0	.198	.099	.028	.195	.098	.028	.188	.096	.028	.181	.094	.028	.175	.092	.027	
7.0	.186	.092	.026	.183	.091	.026	.177	.089	.026	.171	.088	.025	.165	.086	.025	
8.0	.175	.086	.024	.172	.085	.024	.167	.083	.024	.161	.082	.024	.156	.080	.023	
9.0	.165	.080	.022	.162	.079	.022	.157	.078	.022	.153	.077	.022	.148	.075	.022	
10.0	.156	.075	.021	.154	.074	.021	.149	.073	.021	.145	.072	.020	.141	.071	.020	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.177	.157	.138	.152	.134	.119	.104	.092	.082	.060	.053	.048	.019	.017	.015	
2.0	.168	.132	.102	.143	.114	.088	.098	.079	.062	.057	.046	.036	.018	.015	.012	
3.0	.159	.114	.078	.136	.098	.068	.094	.068	.048	.054	.040	.028	.017	.013	.009	
4.0	.151	.100	.062	.130	.087	.054	.089	.061	.038	.052	.035	.022	.017	.012	.007	
5.0	.144	.090	.050	.124	.078	.043	.085	.054	.031	.049	.032	.018	.016	.010	.006	
6.0	.137	.081	.041	.118	.070	.036	.081	.049	.025	.047	.029	.015	.015	.009	.005	
7.0	.131	.074	.035	.112	.064	.030	.078	.045	.022	.045	.027	.013	.015	.009	.004	
8.0	.125	.069	.030	.107	.059	.026	.074	.042	.019	.043	.025	.011	.014	.008	.004	
9.0	.119	.064	.026	.102	.055	.023	.071	.039	.016	.041	.023	.010	.013	.008	.003	
10.0	.114	.059	.023	.098	.052	.020	.068	.036	.014	.040	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:19 December 2022

g Range: 0 - 90DEG
 g Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=1.0000]
 Remarks: ZG1BME ACTEC MINI-10-500

UGR(Unified Glare Rating) Table

Test:U:230.64V I:0.0442A P:9.1079W PF:0.8920 Freq:49.99Hz Lamp Flux:897.062x1 lm										
NAME: Cone shade 7.5W LED wall light					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: CG LIGHTING					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.8	18.2	17.1	18.4	18.6	20.0	21.4	20.2	21.6	21.8
3H	17.0	18.3	17.3	18.5	18.8	21.3	22.6	21.6	22.8	23.1
4H	17.0	18.2	17.3	18.5	18.7	21.8	23.0	22.1	23.2	23.5
6H	16.9	18.1	17.3	18.4	18.6	22.0	23.2	22.3	23.4	23.7
8H	16.9	18.0	17.2	18.3	18.6	22.1	23.2	22.4	23.4	23.7
12H	16.9	17.9	17.2	18.2	18.5	22.1	23.2	22.5	23.5	23.8
4H 2H	17.7	19.0	18.0	19.2	19.5	20.2	21.4	20.5	21.7	21.9
3H	18.1	19.1	18.4	19.4	19.7	21.7	22.8	22.1	23.1	23.4
4H	18.1	19.1	18.5	19.4	19.7	22.3	23.2	22.6	23.5	23.9
6H	18.1	18.9	18.5	19.3	19.6	22.6	23.4	23.0	23.8	24.2
8H	18.1	18.9	18.5	19.2	19.6	22.7	23.5	23.1	23.8	24.2
12H	18.0	18.8	18.5	19.1	19.5	22.8	23.5	23.2	23.9	24.3
8H 4H	18.4	19.2	18.8	19.5	19.9	22.2	23.0	22.6	23.4	23.8
6H	18.4	19.1	18.9	19.5	19.9	22.6	23.3	23.1	23.7	24.1
8H	18.4	19.0	18.9	19.4	19.9	22.8	23.4	23.2	23.8	24.2
12H	18.4	18.9	18.9	19.4	19.9	23.0	23.4	23.4	23.9	24.4
12H 4H	18.4	19.1	18.8	19.5	19.9	22.2	22.9	22.6	23.3	23.7
6H	18.5	19.1	18.9	19.5	19.9	22.6	23.2	23.1	23.6	24.1
8H	18.5	19.0	19.0	19.5	19.9	22.8	23.3	23.3	23.7	24.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.7					+ 0.2 / - 0.2				
1.5H	+ 0.5 / - 0.9					+ 0.2 / - 0.4				
2.0H	+ 0.8 / - 2.1					+ 0.5 / - 0.7				

CIE Pub.117, 897.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.4)

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:19 December 2022

g Range: 0 - 90DEG
 g Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=1.0000]
 Remarks: ZG1BME ACTEC MINI-10-500

UTILIZATION FACTORS TABLE

Test:U:230.64V I:0.0442A P:9.1079W PF:0.8920 Freq:49.99Hz Lamp Flux:897.062x1 lm		
NAME: Cone shade 7.5W LED wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	63	52	45	62	52	45	61	51	45	39
0.80	73	62	56	72	62	55	70	61	55	49
1.00	81	71	65	80	71	65	78	72	64	58
1.25	88	79	73	87	78	72	84	77	71	65
1.50	93	84	78	91	83	78	88	82	76	70
2.00	99	91	86	97	90	85	94	88	84	77
2.50	102	95	90	100	94	89	97	91	87	80
3.00	105	99	94	103	98	93	99	95	91	83
4.00	108	104	100	106	102	98	102	98	95	87
5.00	110	106	103	108	104	101	104	101	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:19 December 2022

g Range: 0 - 90DEG
 g Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=1.0000]
 Remarks: ZG1BME ACTEC MINI-10-500

ISOCANDELA DIAGRAM

Test:U:230.64V I:0.0442A P:9.1079W PF:0.8920 Freq:49.99Hz Lamp Flux:897.062x1 lm		
NAME: Cone shade 7.5W LED wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

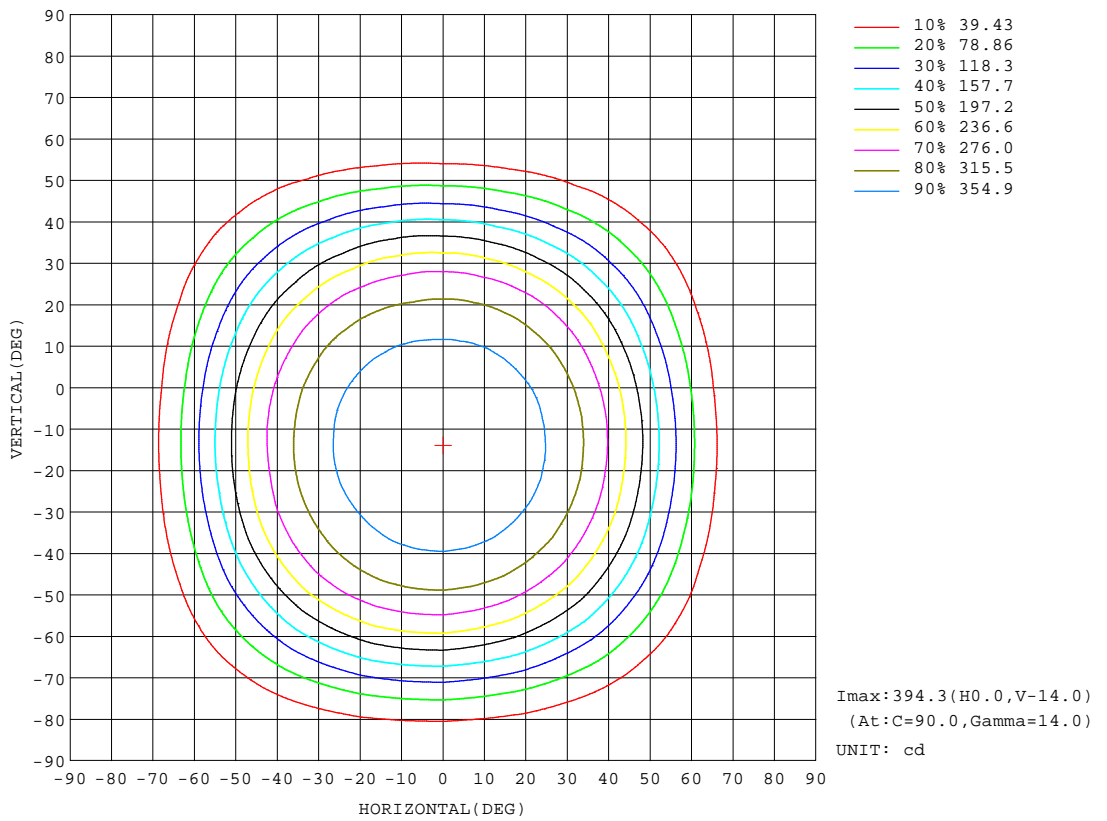


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:19 December 2022

Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=1.0000]
 Remarks: ZG1BME ACTEC MINI-10-500

AAI CURVES

Test:U:230.64V I:0.0442A P:9.1079W PF:0.8920 Freq:49.99Hz Lamp Flux:897.062x1 lm		
NAME: Cone shade 7.5W LED wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

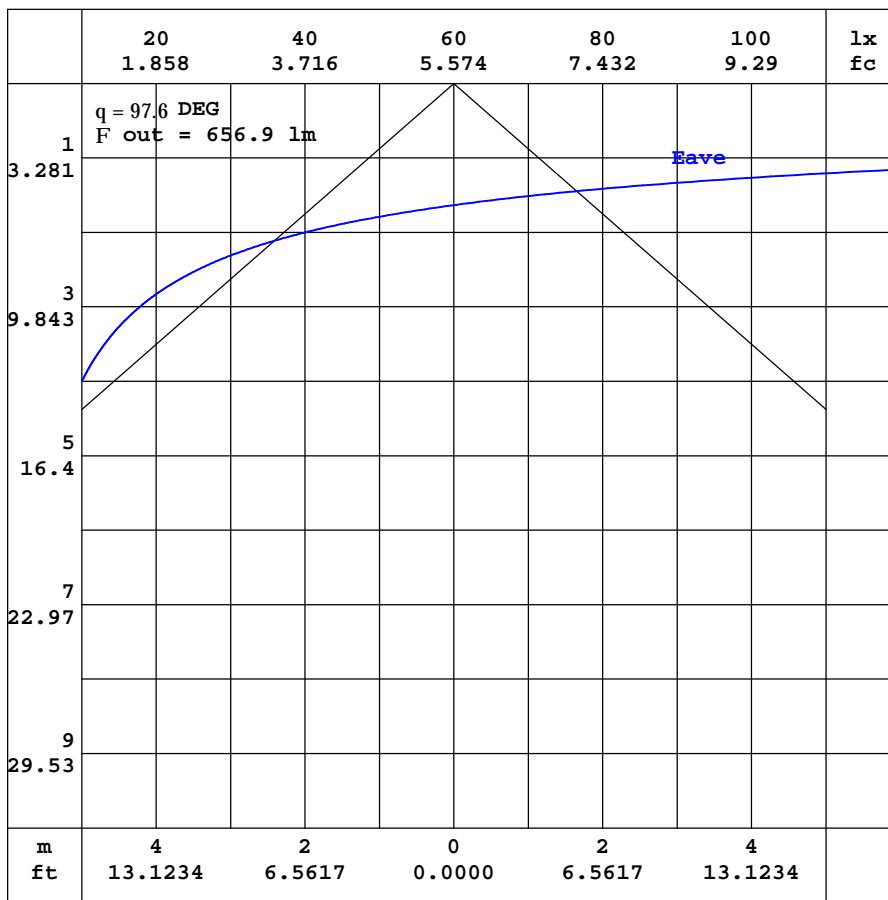


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:19 December 2022

Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=1.0000]
 Remarks: ZG1BME ACTEC MINI-10-500

ISOLUX DIAGRAM

Test:U:230.64V I:0.0442A P:9.1079W PF:0.8920 Freq:49.99Hz Lamp Flux:897.062x1 lm		
NAME: Cone shade 7.5W LED wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

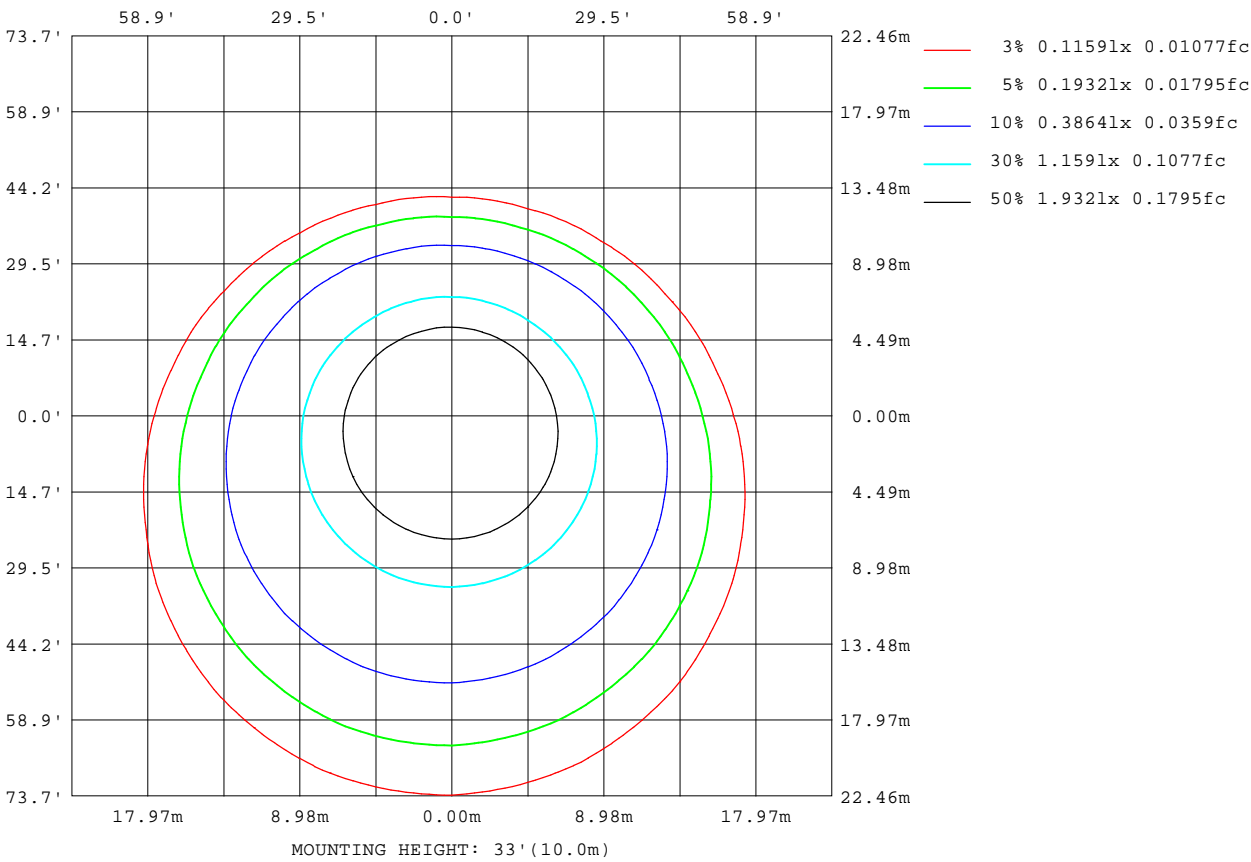

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LQL
 Test Date: 19 December 2022

Page Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity: 65.0%
 Test Distance: 10.365m [K=1.0000]
 Remarks: ZG1BME ACTEC MINI-10-500

LED Avg.L Report

Test:U:230.64V I:0.0442A P:9.1079W PF:0.8920 Freq:49.99Hz Lamp Flux:897.062x1 lm		
NAME: Cone shade 7.5W LED wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1179
L_0~180(75)av	549
L_0~180(85)av	296
L_90~270(65)av	2255
L_90~270(75)av	1601
L_90~270(85)av	1265
L_45(65)av	1783
L_45(75)av	989
L_45(85)av	818

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:19 December 2022

g Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=1.0000]
 Remarks: ZG1BME ACTEC MINI-10-500

Planar Illuminance Curve

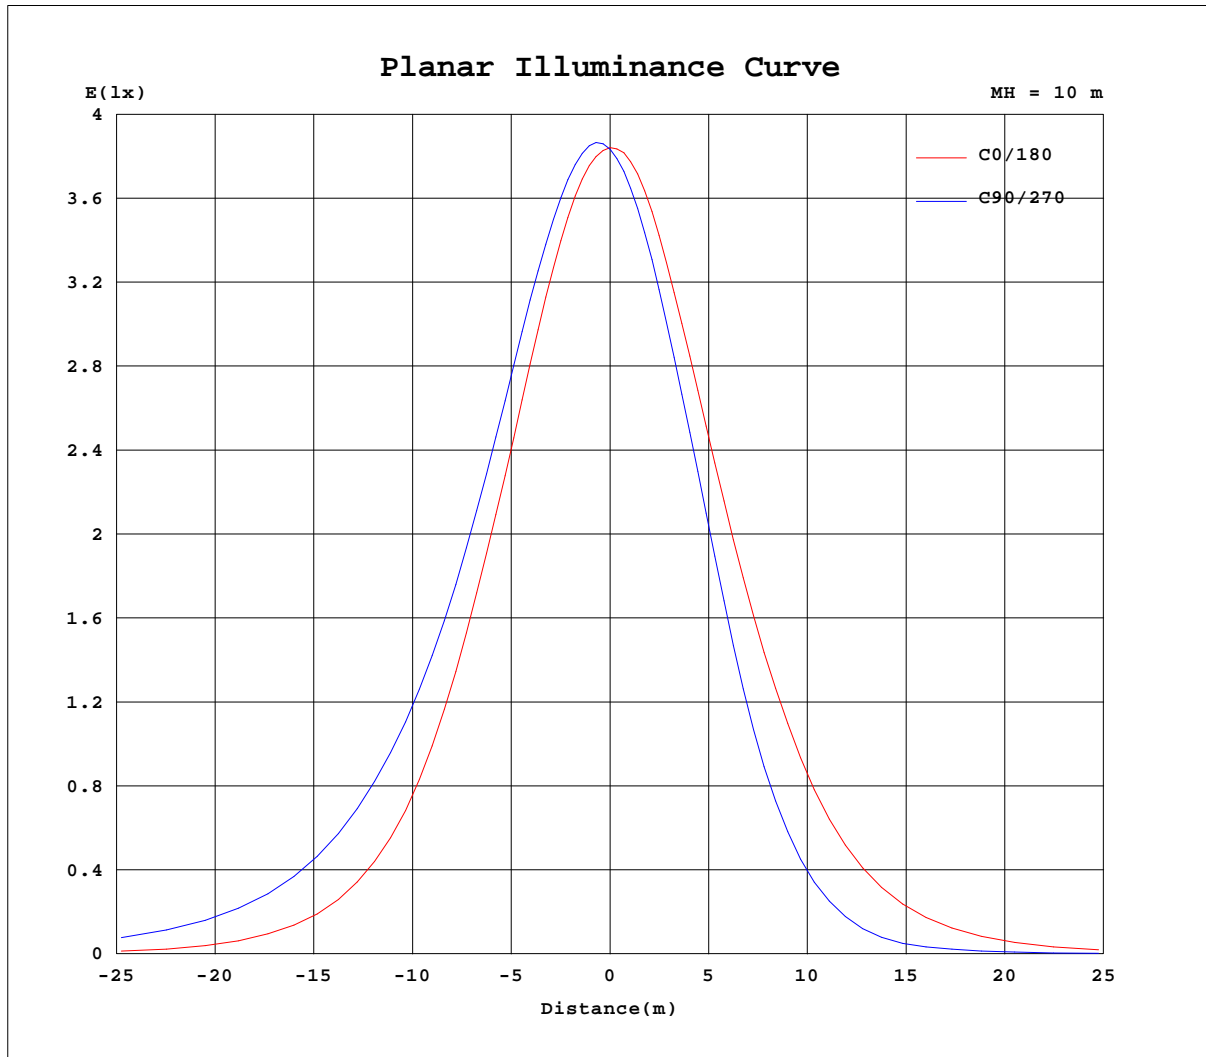

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LQL
 Test Date: 19 December 2022

Page Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity: 65.0%
 Test Distance: 10.365m [K=1.0000]
 Remarks: ZG1BME ACTEC MINI-10-500

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.64V I:0.0442A P:9.1079W PF:0.8920 Freq:49.99Hz Lamp Flux:897.062x1 lm		
NAME: Cone shade 7.5W LED wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C(DEG) g (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	384	384	384	384	384	384	384	384	383	384	383	383	383	383	383	383	383		
5	383	382	381	379	378	377	376	376	376	376	376	376	376	378	378	380	381		
10	377	375	371	369	366	364	362	360	360	360	361	363	364	367	369	372	375		
15	370	366	362	358	354	351	348	347	347	347	348	350	352	356	359	363	367		
20	356	350	344	338	333	328	324	322	322	322	324	326	330	334	339	345	351		
25	345	337	328	322	315	309	305	303	302	302	304	308	311	317	323	330	337		
30	321	311	301	291	281	273	266	262	259	260	261	267	273	282	291	301	312		
35	301	290	277	264	250	240	231	226	222	222	224	229	237	248	260	275	288		
40	264	246	225	209	193	183	173	167	162	163	164	170	178	190	203	221	239		
45	229	208	187	171	155	143	132	126	121	122	124	131	138	151	165	183	201		
50	171	151	130	113	97.7	86.4	76.5	71.6	67.4	68.1	70.0	76.6	83.5	95.8	108	126	144		
55	133	113	93.1	78.6	64.1	54.2	46.0	42.1	39.2	39.9	41.4	46.5	52.3	62.9	74.5	90.5	107		
60	78.8	62.0	45.8	35.1	27.2	23.8	21.0	19.7	18.6	19.0	19.5	21.4	23.5	27.1	33.2	44.6	58.3		
65	48.4	34.9	25.8	21.3	17.2	14.8	12.8	11.8	11.2	11.4	11.9	13.3	15.0	17.8	21.1	25.6	33.1		
70	21.6	16.8	12.7	9.93	7.53	6.07	4.83	4.30	3.91	4.09	4.38	5.32	6.43	8.26	10.4	13.5	17.1		
75	13.4	9.99	7.10	5.07	3.37	2.29	1.54	1.23	1.09	1.14	1.34	1.87	2.71	4.06	5.68	7.97	10.6		
80	5.48	3.33	1.68	0.69	0.47	0.55	0.57	0.69	0.68	0.72	0.61	0.63	0.55	0.55	1.14	2.35	4.13		
85	2.04	0.82	0.47	0.57	0.58	0.74	0.83	0.90	0.87	0.93	0.83	0.83	0.71	0.69	0.58	0.58	1.36		
90	0.49	0.59	0.72	0.86	0.97	1.08	1.12	1.25	1.32	1.31	1.19	1.18	1.06	1.00	0.86	0.83	0.66		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:19 December 2022

g Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=1.0000]
 Remarks: ZG1BME ACTEC MINI-10-500