
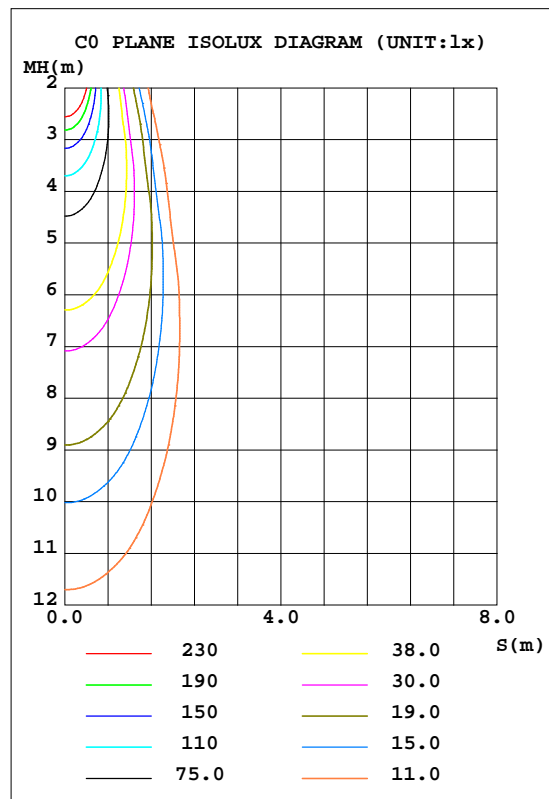


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.72V I:0.0579A P:7.4366W PF:55484.0000 Freq:49.99Hz Lamp Flux:315.868x2 lm		
NAME: Uba outdoor 2x3.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 84.95 lm/W
MODEL	1982B-Q5	I _{max} (cd)	1511	S/MH(C0/180)		0.49
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)		0.45
RATED VOLTAGE(V)	230.0	TOTAL FLUX(lm)	631.74	h UP, DN(C0-180)		0.0,52.5
NOMINAL FLUX(lm)	315.868	CIE CLASS	DIRECT	h UP, DN(C180-360)		0.0,47.5
LAMPS INSIDE	2	h up(%)	0.0	CIBSE SHR NOM		0.50
TEST VOLTAGE(V)	230.0	h down(%)	100.0	CIBSE SHR MAX		0.55

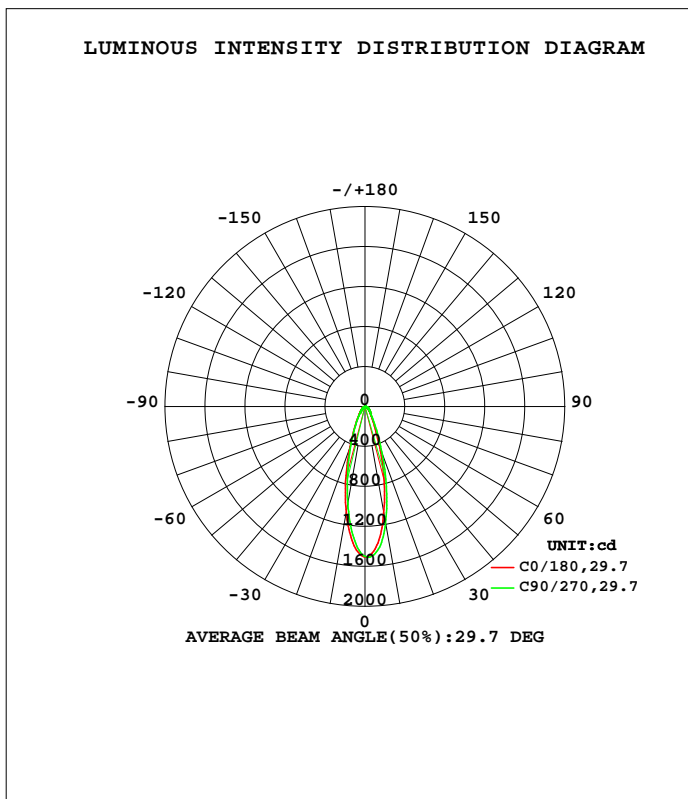

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

Range: 0 - 180DEG
 Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1087	1163	1188	1139	1083	1021	994.2	1024	0- 10	122.3	122.3	19.4,19.4
20	443.7	485.6	505.8	482.1	456.8	439.0	427.7	421.1	10- 20	203.8	326.1	51.6,51.6
30	154.6	173.1	183.3	173.8	167.9	164.0	159.6	153.7	20- 30	126.1	452.3	71.6,71.6
40	78.39	83.54	86.23	86.54	80.07	76.67	74.22	75.14	30- 40	70.72	523.0	82.8,82.8
50	44.83	47.62	49.49	48.38	46.17	44.27	42.85	43.15	40- 50	46.82	569.8	90.2,90.2
60	27.40	29.09	30.38	29.59	28.19	27.15	26.17	26.51	50- 60	32.55	602.3	95.3,95.3
70	13.65	14.67	15.15	14.56	13.51	12.89	12.52	12.91	60- 70	20.52	622.9	98.6,98.6
80	2.900	3.319	3.416	2.983	2.324	2.070	2.086	2.343	70- 80	8.122	631.0	99.9,99.9
90	0.0590	0.0516	0.0443	0.0590	0.0177	0.0775	0.0885	0.0922	80- 90	0.7562	631.7	100,100
100	0	0	0	0	0	0	0	0	90-100	0.0019	631.7	100,100
110	0	0	0	0	0	0	0	0	100-110	0	631.7	100,100
120	0	0	0	0	0	0	0	0	110-120	0	631.7	100,100
130	0	0	0	0	0	0	0	0	120-130	0	631.7	100,100
140	0	0	0	0	0	0	0	0	130-140	0	631.7	100,100
150	0	0	0	0	0	0	0	0	140-150	0	631.7	100,100
160	0	0	0	0	0	0	0	0	150-160	0	631.7	100,100
170	0	0	0	0	0	0	0	0	160-170	0	631.7	100,100
180	0	0	0	0	0	0	0	0	170-180	0	631.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

g Range: 0 - 180DEG
 Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350

LUMINANCE LIMITATION CURVES

Test:U:230.72V I:0.0579A P:7.4366W PF:55484.0000 Freq:49.99Hz Lamp Flux:315.868x2 lm		
NAME: Uba outdoor 2x3.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

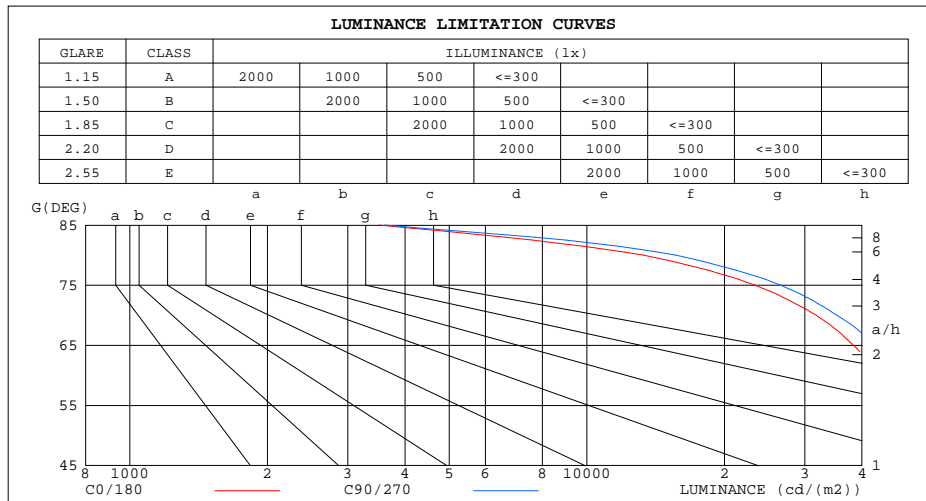

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	3506	3602
80	13298	15661
75	23363	26563
70	31764	35276
65	38332	42554
60	43625	48370
55	49129	54063
50	55531	61298
45	66328	73902


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

G Range: 0 - 180DEG
 G Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.72V I:0.0579A P:7.4366W PF:55484.0000 Freq:49.99Hz Lamp Flux:315.868x2 lm		
NAME: Uba outdoor 2x3.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.08	1.05	1.08	1.06	1.04	1.04	1.02	1.00	1.00	.99	.97	.97	.96	.95	.93
2.0	1.02	.98	.95	1.01	.97	.94	.97	.94	.91	.94	.92	.90	.92	.89	.88	.86
3.0	.95	.90	.86	.94	.89	.85	.91	.87	.84	.89	.86	.83	.87	.84	.82	.80
4.0	.89	.84	.79	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.72	.78	.75	.72	.70
6.0	.79	.74	.69	.79	.73	.69	.77	.72	.69	.76	.71	.68	.74	.71	.68	.66
7.0	.75	.69	.65	.75	.69	.65	.73	.68	.65	.72	.68	.65	.71	.67	.64	.63
8.0	.72	.66	.62	.71	.66	.62	.70	.65	.62	.69	.65	.61	.68	.64	.61	.60
9.0	.68	.63	.59	.68	.63	.59	.67	.62	.59	.66	.62	.58	.65	.61	.58	.57
10.0	.65	.60	.56	.65	.60	.56	.64	.59	.56	.63	.59	.56	.63	.59	.56	.54

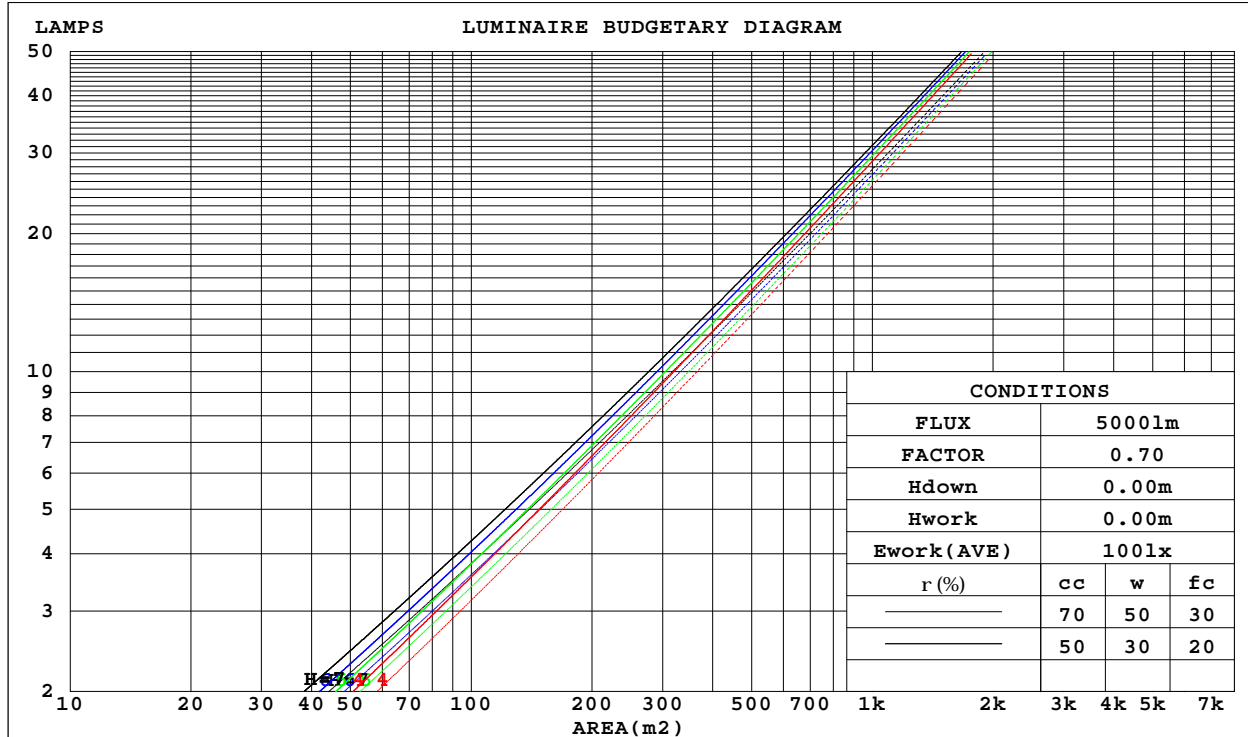

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

Range: 0 - 180DEG
 Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350

WEC AND CCEC

Test:U:230.72V I:0.0579A P:7.4366W PF:55484.0000 Freq:49.99Hz Lamp Flux:315.868x2 lm		
NAME: Uba outdoor 2x3.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.187	.106	.034	.180	.103	.033	.167	.096	.031	.156	.090	.029	.145	.084	.027	
2.0	.178	.097	.030	.172	.095	.029	.161	.090	.028	.152	.085	.027	.143	.081	.025	
3.0	.167	.089	.027	.163	.087	.026	.153	.083	.025	.145	.079	.024	.137	.076	.024	
4.0	.157	.082	.024	.153	.080	.024	.145	.077	.023	.138	.074	.022	.131	.071	.022	
5.0	.148	.075	.022	.144	.074	.022	.138	.072	.021	.131	.069	.021	.125	.067	.020	
6.0	.140	.070	.020	.137	.069	.020	.131	.067	.019	.125	.065	.019	.120	.063	.019	
7.0	.132	.065	.019	.129	.064	.018	.124	.063	.018	.119	.061	.018	.114	.059	.017	
8.0	.125	.061	.017	.123	.060	.017	.118	.059	.017	.114	.058	.017	.110	.056	.016	
9.0	.119	.058	.016	.117	.057	.016	.113	.056	.016	.109	.054	.016	.105	.053	.015	
10.0	.113	.054	.015	.111	.054	.015	.108	.053	.015	.104	.052	.015	.101	.051	.015	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.144	.147	.135	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.157	.132	.112	.135	.114	.097	.092	.079	.067	.053	.046	.040	.017	.015	.013	
3.0	.145	.114	.089	.124	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.134	.099	.072	.115	.085	.063	.079	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.125	.087	.059	.107	.076	.052	.074	.053	.036	.043	.031	.022	.014	.010	.007	
6.0	.117	.078	.050	.101	.068	.043	.069	.047	.031	.040	.028	.018	.013	.009	.006	
7.0	.110	.070	.042	.095	.061	.037	.065	.043	.026	.038	.025	.016	.012	.008	.005	
8.0	.104	.064	.036	.090	.055	.032	.062	.039	.023	.036	.023	.013	.012	.008	.004	
9.0	.098	.059	.032	.085	.051	.028	.059	.036	.020	.034	.021	.012	.011	.007	.004	
10.0	.093	.054	.028	.081	.047	.024	.056	.033	.017	.033	.020	.010	.011	.006	.003	

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350

UGR(Unified Glare Rating) Table

Test:U:230.72V I:0.0579A P:7.4366W PF:55484.0000 Freq:49.99Hz Lamp Flux:315.868x2 lm										
NAME: Uba outdoor 2x3.5W					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: CG LIGHTING					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.8	25.7	25.0	25.9	26.1	25.2	26.2	25.5	26.3	26.5
3H	25.6	26.5	25.8	26.7	26.9	26.1	26.9	26.3	27.1	27.3
4H	25.8	26.6	26.1	26.9	27.1	26.3	27.1	26.6	27.3	27.6
6H	25.8	26.6	26.1	26.9	27.1	26.3	27.1	26.6	27.4	27.6
8H	25.8	26.6	26.1	26.8	27.1	26.3	27.1	26.6	27.3	27.6
12H	25.8	26.5	26.1	26.8	27.0	26.3	27.0	26.6	27.3	27.6
4H 2H	25.2	26.0	25.5	26.3	26.5	25.6	26.4	25.8	26.6	26.8
3H	26.1	26.9	26.5	27.1	27.4	26.5	27.3	26.9	27.5	27.8
4H	26.4	27.1	26.8	27.4	27.7	26.8	27.5	27.2	27.8	28.1
6H	26.5	27.1	26.9	27.4	27.8	26.9	27.5	27.3	27.9	28.2
8H	26.5	27.0	26.9	27.4	27.7	26.9	27.5	27.3	27.8	28.2
12H	26.4	26.9	26.8	27.3	27.7	26.9	27.4	27.3	27.8	28.1
8H 4H	26.5	27.0	26.9	27.4	27.7	26.9	27.4	27.3	27.8	28.1
6H	26.6	27.0	27.0	27.4	27.9	27.0	27.5	27.4	27.9	28.3
8H	26.6	27.0	27.0	27.4	27.8	27.0	27.4	27.5	27.8	28.3
12H	26.5	26.9	27.0	27.3	27.8	27.0	27.3	27.4	27.7	28.2
12H 4H	26.4	26.9	26.9	27.3	27.7	26.8	27.3	27.2	27.7	28.1
6H	26.6	27.0	27.0	27.4	27.8	27.0	27.4	27.4	27.8	28.2
8H	26.5	26.9	27.0	27.3	27.8	27.0	27.3	27.4	27.8	28.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.7					+ 0.5 / - 0.7				
1.5H	+ 0.4 / - 0.5					+ 0.5 / - 0.4				
2.0H	+ 0.8 / - 0.7					+ 0.9 / - 0.7				

CIE Pub.117, 631.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.6)

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350

UTILIZATION FACTORS TABLE

Test:U:230.72V I:0.0579A P:7.4366W PF:55484.0000 Freq:49.99Hz Lamp Flux:315.868x2 lm		
NAME: Uba outdoor 2x3.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	81	73	69	80	73	69	79	73	69	64
0.80	89	82	77	88	81	77	87	81	77	72
1.00	94	88	83	93	87	83	92	87	82	78
1.25	99	93	89	98	92	88	96	91	87	83
1.50	102	96	92	101	96	92	99	94	91	86
2.00	106	101	97	104	100	96	101	98	95	89
2.50	108	103	100	106	102	99	103	100	97	91
3.00	110	106	103	108	104	102	105	102	99	93
4.00	112	109	106	110	107	105	107	104	102	95
5.00	114	111	109	112	109	107	108	106	104	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350

ISOCANDELA DIAGRAM

Test:U:230.72V I:0.0579A P:7.4366W PF:55484.0000 Freq:49.99Hz Lamp Flux:315.868x2 lm		
NAME: Uba outdoor 2x3.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

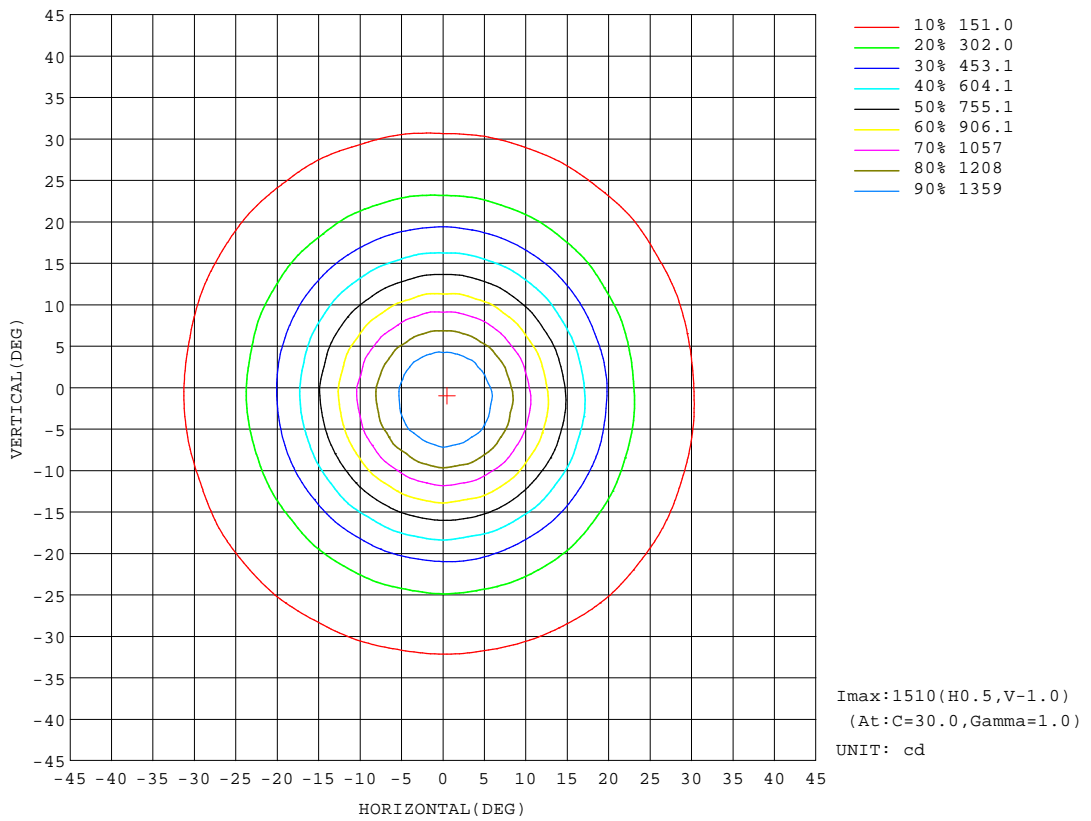


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

Range: 0 - 180DEG
 Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350

AAI CURVES

Test:U:230.72V I:0.0579A P:7.4366W PF:55484.0000 Freq:49.99Hz Lamp Flux:315.868x2 lm		
NAME: Uba outdoor 2x3.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

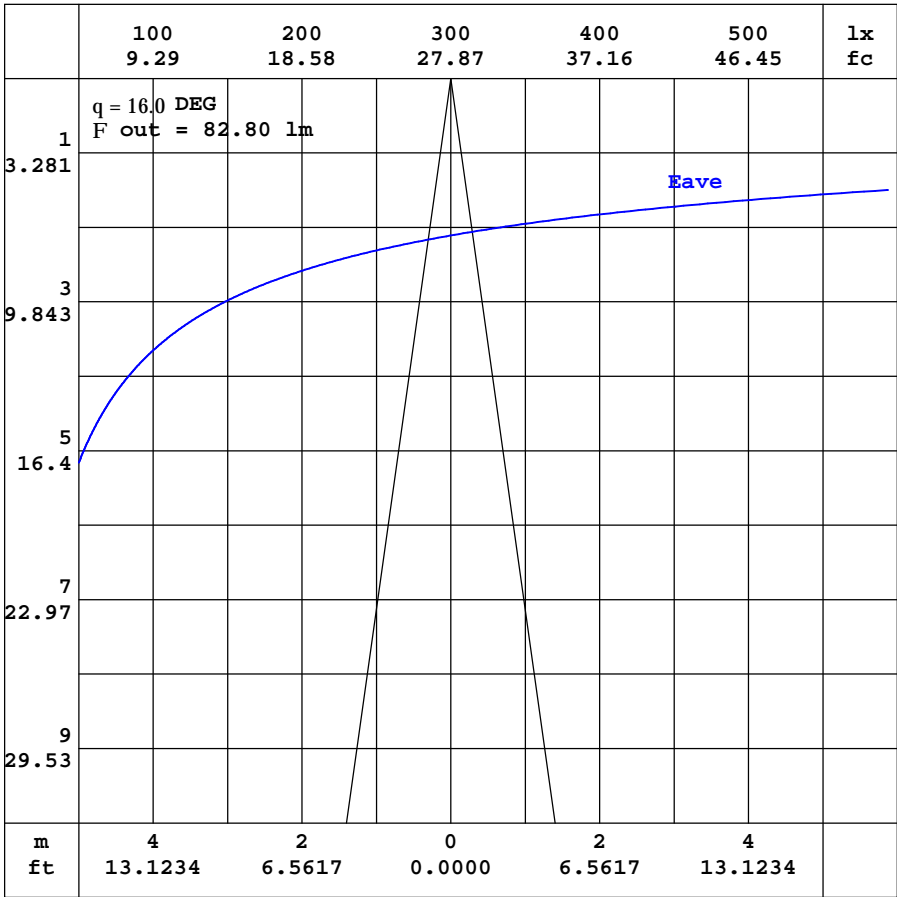


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

Range: 0 - 180DEG
 Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350

ISOLUX DIAGRAM

Test:U:230.72V I:0.0579A P:7.4366W PF:55484.0000 Freq:49.99Hz Lamp Flux:315.868x2 lm		
NAME: Uba outdoor 2x3.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

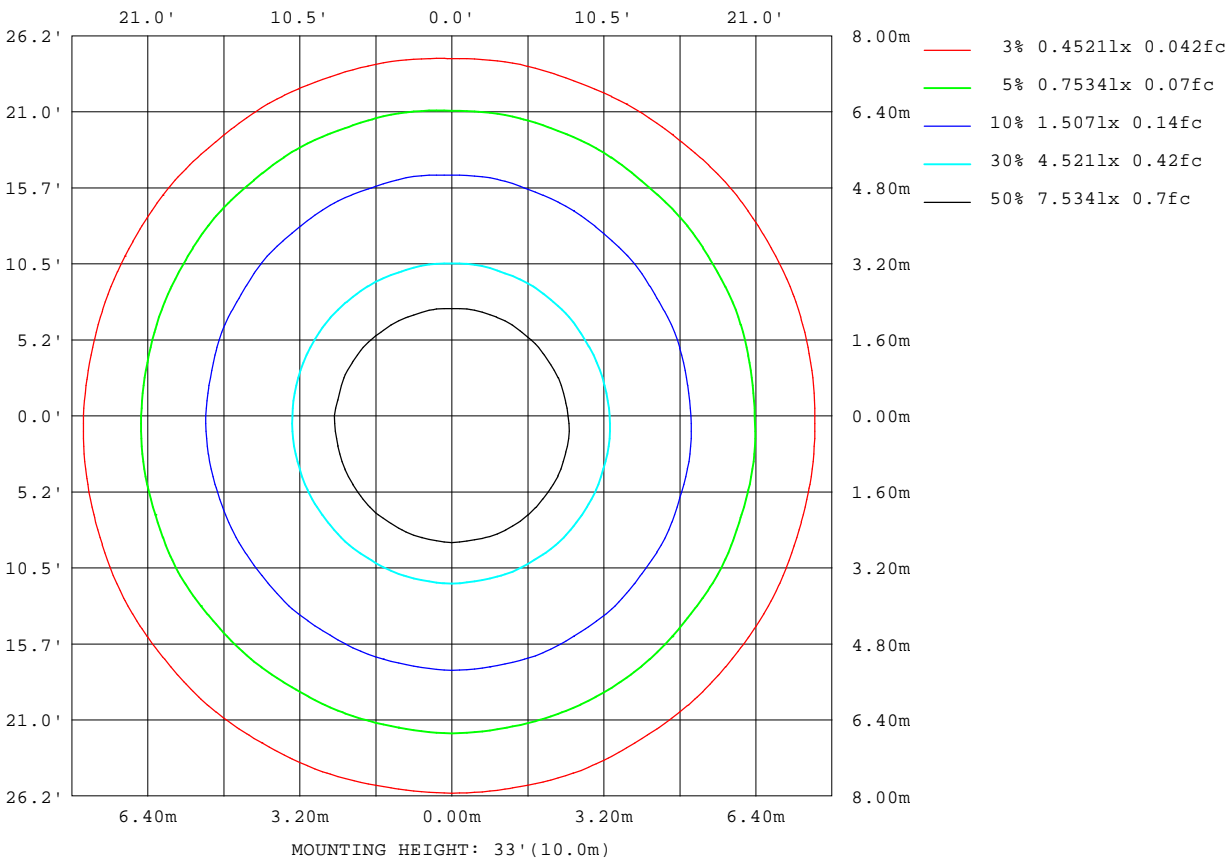

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

Page Range: 0 - 180DEG
 Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350

LED Avg.L Report

Test:U:230.72V I:0.0579A P:7.4366W PF:55484.0000 Freq:49.99Hz Lamp Flux:315.868x2 lm		
NAME: Uba outdoor 2x3.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	38569
L_0~180(75)av	22748
L_0~180(85)av	2485
L_90~270(65)av	39376
L_90~270(75)av	23391
L_90~270(85)av	3009
L_45(65)av	39090
L_45(75)av	23095
L_45(85)av	2957

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350

Planar Illuminance Curve

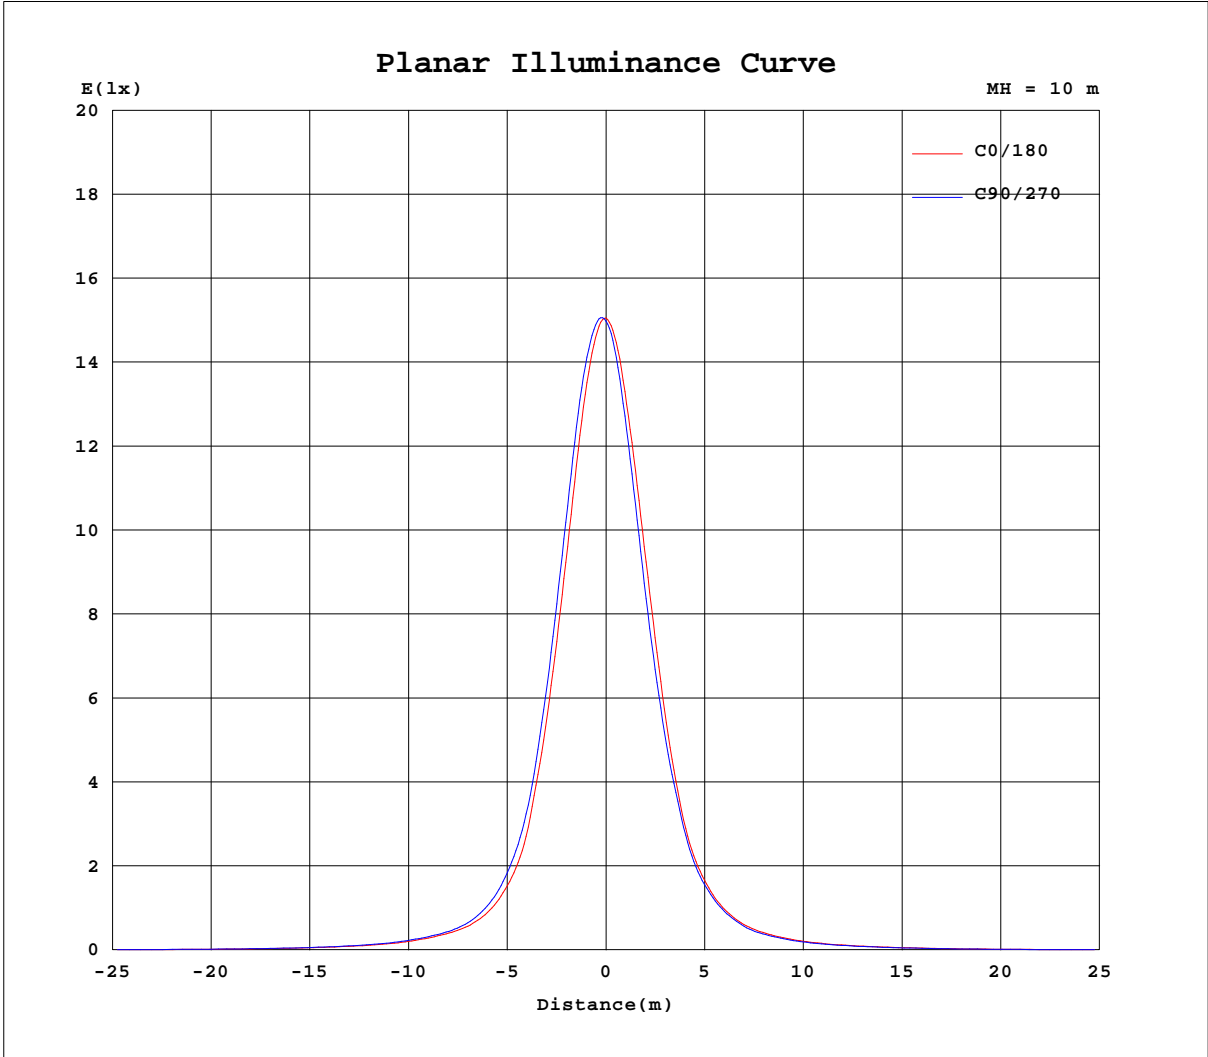

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: LQL
Test Date: 15 June 2023

Page Range: 0 - 180DEG
Page Interval: 0.5DEG
Test System: EVERFINE GO-2000_V1 SYSTEM V2.0.403
Humidity: 65.0%
Test Distance: 10.365m [K=0.9648]
Remarks: ZG1BMC30F00 MINI-4-350

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.72V I:0.0579A P:7.4366W PF:55484.0000 Freq:49.99Hz Lamp Flux:315.868x2 lm		
NAME: Uba outdoor 2x3.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	1505	1506	1506	1505	1505	1506	1507	1504	1502	1502	1502	1503	1503	1503	1502	1502	1502	1500	1498
5	1393	1402	1408	1411	1413	1419	1426	1429	1433	1439	1444	1442	1440	1443	1447	1447	1446	1448	1448
10	1087	1102	1112	1117	1121	1132	1143	1148	1153	1163	1173	1176	1177	1184	1189	1185	1181	1184	1188
15	737	748	756	762	767	778	788	792	795	803	811	817	821	826	829	826	823	826	829
20	444	443	446	454	463	467	470	474	480	486	491	493	494	498	502	502	501	504	506
25	248	251	254	257	259	264	269	272	275	282	288	290	292	295	297	297	296	298	299
30	155	157	158	160	161	164	167	168	170	173	176	178	179	181	183	182	181	182	183
35	104	104	105	105	106	108	110	110	110	112	113	115	116	116	117	117	117	118	118
40	78.4	79.1	79.7	80.1	80.6	81.4	82.2	82.6	82.9	83.5	84.2	84.7	85.3	86.0	86.6	86.5	86.2	86.2	86.2
45	58.9	59.8	60.5	60.8	61.0	61.4	61.9	62.0	62.3	63.2	64.2	64.7	65.0	65.5	65.7	65.5	65.2	65.4	65.6
50	44.8	45.2	45.6	45.8	46.0	46.3	46.7	46.9	47.1	47.6	48.1	48.5	48.7	49.0	49.1	49.1	49.1	49.3	49.5
55	35.4	35.7	36.0	36.1	36.3	36.5	36.8	37.0	37.1	37.5	37.9	37.9	38.0	38.3	38.6	38.5	38.4	38.7	38.9
60	27.4	27.8	28.0	28.1	28.1	28.4	28.7	28.7	28.8	29.1	29.4	29.4	29.5	29.8	30.1	30.0	29.9	30.1	30.4
65	20.3	20.6	20.8	20.8	20.8	21.0	21.3	21.4	21.5	21.7	21.9	22.0	22.0	22.2	22.4	22.3	22.2	22.4	22.6
70	13.6	13.9	14.0	14.0	14.0	14.1	14.3	14.4	14.5	14.7	14.9	14.9	14.9	15.1	15.2	15.1	15.0	15.1	15.2
75	7.59	7.72	7.81	7.85	7.90	8.03	8.15	8.19	8.21	8.31	8.41	8.46	8.50	8.59	8.66	8.62	8.56	8.60	8.63
80	2.90	2.91	2.94	3.00	3.06	3.10	3.14	3.19	3.26	3.32	3.37	3.39	3.40	3.43	3.45	3.43	3.40	3.41	3.42
85	0.38	0.32	0.31	0.38	0.45	0.43	0.40	0.44	0.47	0.44	0.41	0.46	0.50	0.45	0.41	0.48	0.53	0.46	0.39
90	0.06	0.06	0.06	0.06	0.06	0.05	0.04	0.05	0.05	0.05	0.05	0.05	0.06	0.07	0.07	0.07	0.07	0.05	0.04
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

g Range: 0 - 180DEG
 Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.72V I:0.0579A P:7.4366W PF:55484.0000 Freq:49.99Hz Lamp Flux:315.868x2 lm		
NAME: Uba outdoor 2x3.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C(DEG) g (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	1498	1499	1498	1497	1499	1500	1498	1497	1499	1501	1499	1496	1497	1498	1497	1497	1501	1505	1506
5	1445	1441	1440	1438	1431	1425	1425	1425	1418	1411	1405	1399	1392	1386	1381	1377	1376	1373	1366
10	1182	1175	1174	1171	1159	1147	1148	1149	1139	1127	1124	1121	1109	1097	1093	1091	1089	1083	1068
15	825	819	817	816	808	801	799	796	788	779	773	769	763	758	752	748	749	748	737
20	504	501	500	498	495	491	489	487	482	477	475	474	472	469	464	459	458	457	456
25	297	294	294	293	290	287	286	285	280	276	275	274	272	270	268	268	268	267	264
30	182	181	181	180	178	176	176	176	174	172	172	172	170	168	168	168	168	168	166
35	117	117	117	117	117	116	117	117	117	116	117	117	116	115	114	113	112	111	110
40	86.1	86.1	86.7	87.2	87.0	86.7	87.1	87.3	86.5	85.6	85.2	84.8	84.1	83.3	82.3	81.4	80.7	80.1	79.4
45	65.4	65.1	65.1	65.2	64.8	64.4	64.6	64.8	64.1	63.2	62.8	62.3	61.6	60.9	60.6	60.4	60.1	59.7	59.1
50	49.4	49.3	49.3	49.2	49.0	48.8	48.7	48.7	48.4	48.1	47.9	47.8	47.5	47.1	46.9	46.7	46.4	46.2	45.8
55	38.9	38.7	38.8	38.9	38.7	38.4	38.5	38.5	38.2	38.0	37.9	37.9	37.6	37.2	37.1	36.9	36.7	36.5	36.1
60	30.3	30.2	30.2	30.2	30.0	29.8	29.9	29.9	29.6	29.3	29.3	29.3	29.0	28.6	28.5	28.4	28.3	28.2	27.9
65	22.5	22.4	22.5	22.5	22.2	22.0	22.1	22.1	22.0	21.7	21.7	21.6	21.4	21.1	21.0	21.0	20.8	20.6	20.4
70	15.1	15.0	15.0	15.1	14.9	14.7	14.8	14.8	14.6	14.3	14.4	14.4	14.1	13.8	13.8	13.8	13.7	13.5	13.3
75	8.57	8.50	8.48	8.45	8.36	8.27	8.26	8.24	8.11	7.97	7.93	7.89	7.74	7.60	7.52	7.45	7.32	7.19	7.10
80	3.37	3.31	3.27	3.24	3.21	3.17	3.10	3.03	2.98	2.93	2.86	2.78	2.72	2.66	2.60	2.53	2.42	2.32	2.31
85	0.44	0.50	0.44	0.38	0.42	0.48	0.45	0.41	0.40	0.38	0.33	0.28	0.29	0.30	0.27	0.23	0.18	0.16	0.21
90	0.05	0.06	0.06	0.05	0.05	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.07	0.07	0.02	0.07
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

g Range: 0 - 180DEG
 Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.72V I:0.0579A P:7.4366W PF:55484.0000 Freq:49.99Hz Lamp Flux:315.868x2 lm		
NAME: Uba outdoor 2x3.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

Table--3

UNIT: cd

C(DEG) g (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	1506	1505	1505	1506	1507	1504	1502	1502	1502	1503	1503	1503	1502	1502	1502	1500	1498	1498	1499
5	1358	1356	1355	1349	1344	1344	1343	1337	1331	1330	1330	1325	1322	1323	1325	1321	1318	1321	1324
10	1055	1056	1058	1049	1038	1034	1031	1021	1012	1010	1010	1003	998	1001	1004	999	994	998	1003
15	726	726	726	719	711	709	706	698	690	687	685	679	674	675	677	675	673	675	677
20	455	452	450	448	446	443	440	439	438	435	432	432	432	428	426	427	428	425	422
25	261	262	263	261	259	260	261	258	256	258	259	257	255	256	256	253	250	251	251
30	165	166	166	165	164	165	165	164	163	164	165	164	162	163	164	162	160	160	160
35	109	108	108	107	107	108	108	108	107	107	107	106	105	106	106	104	103	103	104
40	78.8	78.7	78.5	77.7	77.0	77.0	77.1	76.7	76.2	76.0	75.9	75.4	74.9	74.8	74.8	74.5	74.2	74.4	74.6
45	58.6	58.5	58.4	57.9	57.3	57.3	57.2	56.8	56.3	56.3	56.2	55.6	55.1	55.1	55.2	54.8	54.6	54.8	55.0
50	45.5	45.5	45.5	45.2	44.9	44.8	44.7	44.3	43.9	43.9	44.0	43.6	43.3	43.2	43.2	43.0	42.8	42.9	42.9
55	35.9	36.0	36.0	35.7	35.4	35.5	35.5	35.2	34.9	34.9	34.8	34.5	34.2	34.2	34.3	34.0	33.8	34.0	34.2
60	27.6	27.7	27.8	27.6	27.3	27.4	27.5	27.1	26.8	26.8	26.9	26.6	26.4	26.4	26.5	26.3	26.2	26.3	26.5
65	20.3	20.3	20.3	20.2	20.0	20.0	20.0	19.8	19.6	19.5	19.5	19.4	19.3	19.3	19.3	19.3	19.2	19.3	19.3
70	13.2	13.2	13.2	13.1	13.0	13.0	13.1	12.9	12.7	12.7	12.7	12.6	12.5	12.6	12.6	12.6	12.5	12.6	12.7
75	7.02	6.97	6.92	6.85	6.78	6.75	6.73	6.66	6.59	6.58	6.58	6.56	6.53	6.53	6.54	6.55	6.57	6.61	6.65
80	2.31	2.22	2.13	2.13	2.15	2.09	2.04	2.07	2.10	2.08	2.04	2.05	2.06	2.04	2.03	2.06	2.09	2.08	2.07
85	0.26	0.21	0.16	0.20	0.24	0.19	0.14	0.19	0.23	0.19	0.15	0.19	0.23	0.19	0.15	0.21	0.26	0.23	0.19
90	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.08	0.08	0.08	0.08	0.09	0.10	0.09	0.09	0.09	0.09	0.09	0.10
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

g Range: 0 - 180DEG
 Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.72V I:0.0579A P:7.4366W PF:55484.0000 Freq:49.99Hz Lamp Flux:315.868x2 lm		
NAME: Uba outdoor 2x3.5W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

Table--4

UNIT: cd

C(DEG) g (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355				
0	1498	1497	1499	1500	1498	1497	1499	1501	1499	1496	1497	1498	1497	1497	1500				
5	1324	1323	1327	1332	1334	1336	1345	1354	1354	1353	1361	1369	1372	1375	1383				
10	1001	1000	1007	1014	1017	1019	1024	1029	1030	1033	1045	1058	1063	1067	1075				
15	676	675	678	681	681	681	685	690	690	691	699	708	712	717	725				
20	423	424	422	420	421	423	421	420	421	423	423	423	428	435	439				
25	248	246	246	246	244	242	243	243	242	241	242	244	244	244	245				
30	159	157	157	156	155	153	154	154	153	151	152	153	153	153	153				
35	103	103	103	103	102	102	103	104	104	103	104	105	105	104	104				
40	74.1	73.7	74.0	74.4	74.4	74.4	75.1	75.8	75.6	75.4	76.1	76.8	77.0	77.1	77.6				
45	54.8	54.6	54.9	55.2	55.1	55.1	55.7	56.3	56.2	56.1	56.7	57.3	57.2	57.3	57.9				
50	42.8	42.7	42.9	43.1	43.0	42.9	43.2	43.4	43.3	43.3	43.6	43.9	43.9	44.0	44.3				
55	34.0	33.9	34.0	34.2	34.1	34.0	34.3	34.5	34.5	34.4	34.6	34.7	34.8	34.9	35.1				
60	26.3	26.2	26.3	26.5	26.4	26.3	26.5	26.7	26.8	26.9	27.1	27.3	27.2	27.0	27.1				
65	19.2	19.2	19.3	19.4	19.3	19.3	19.6	19.8	19.8	19.9	20.0	20.1	20.0	19.9	20.1				
70	12.6	12.5	12.7	12.8	12.8	12.7	12.9	13.1	13.2	13.2	13.3	13.4	13.4	13.4	13.5				
75	6.68	6.71	6.77	6.83	6.85	6.88	6.95	7.03	7.08	7.13	7.21	7.29	7.35	7.41	7.49				
80	2.14	2.20	2.21	2.22	2.28	2.34	2.34	2.35	2.43	2.51	2.54	2.56	2.63	2.72	2.81				
85	0.23	0.27	0.24	0.22	0.24	0.27	0.27	0.27	0.31	0.34	0.29	0.26	0.31	0.38	0.39				
90	0.10	0.10	0.09	0.09	0.09	0.09	0.09	0.10	0.10	0.10	0.10	0.10	0.09	0.07	0.07				
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:LQL
 Test Date:15 June 2023

g Range: 0 - 180DEG
 Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.365m [K=0.9648]
 Remarks: ZG1BMC30F00 MINI-4-350