
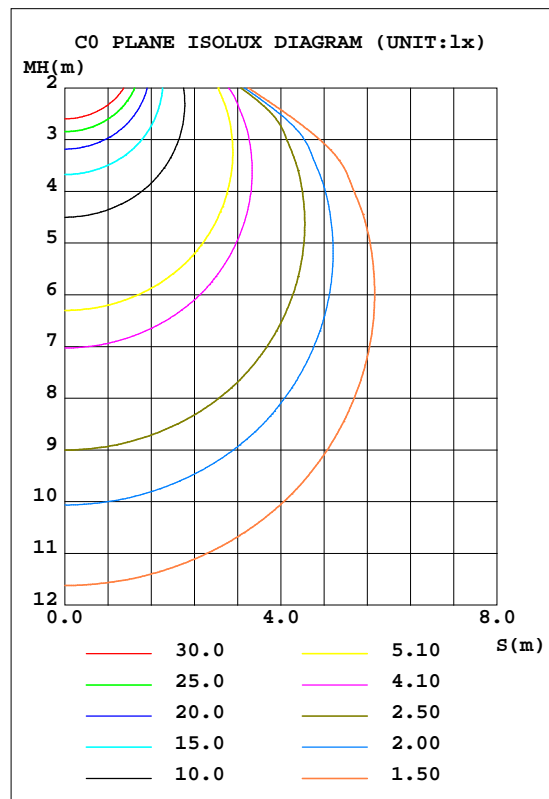


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.55V I:0.0307A P:6.4881W PF:0.9166 Freq:49.99Hz Lamp Flux:438.797x1 lm		
NAME: Boss 5W LED outdoor wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	1360D	Imax(cd)	202.6	S/MH(C0/180)	1.27
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	230.0	TOTAL FLUX(lm)	438.80	h UP, DN(C0-180)	0.0,50.9
NOMINAL FLUX(lm)	438.797	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,49.1
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230.0	h down(%)	100.0	CIBSE SHR MAX	1.35

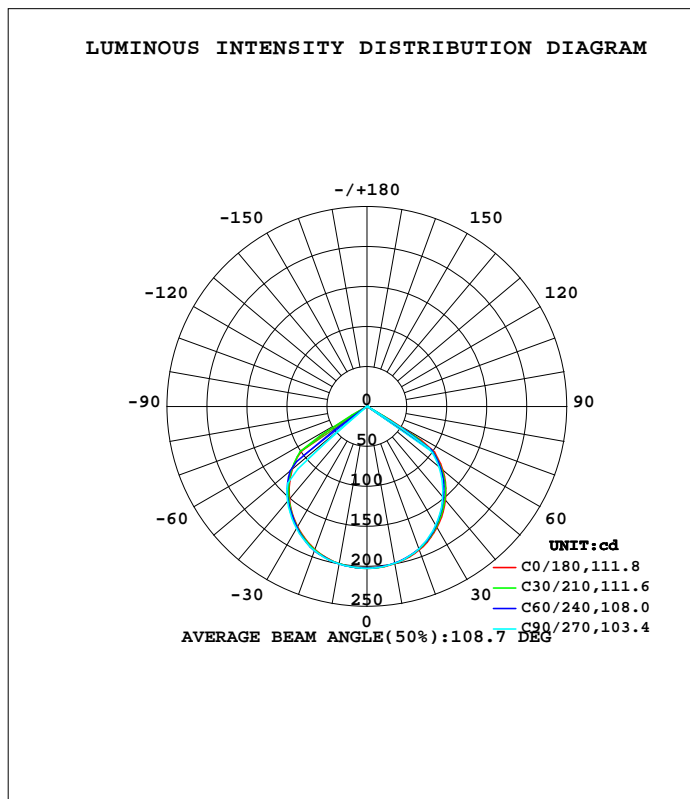

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:01 March 2021

Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.258m [K=1.0000]
 Remarks: ZG1 BMC30F00 HEP LNTC6W500LR

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	199.7	199.1	199.2	199.2	199.7	199.7	200.1	200.1	0- 10	19.18	19.18	4.37,4.37
20	191.0	189.6	189.5	189.3	190.3	191.4	191.9	191.7	10- 20	55.33	74.51	17,17
30	175.1	173.2	171.8	172.4	173.6	174.8	176.2	176.5	20- 30	84.46	159.0	36.2,36.2
40	152.8	150.5	147.4	149.4	151.0	152.0	154.7	156.2	30- 40	102.4	261.3	59.6,59.6
50	124.1	120.5	117.7	117.4	121.7	124.2	47.59	122.5	40- 50	105.7	367.0	83.6,83.6
60	33.94	18.84	10.33	9.114	13.69	15.36	1.143	24.12	50- 60	67.32	434.3	99,99
70	1.072	1.314	1.450	1.264	0.9069	0.8820	0.8289	0.8713	60- 70	3.120	437.4	99.7,99.7
80	0.6718	0.8466	0.9067	0.8109	0.5855	0.3501	0.1218	0.3502	70- 80	0.8794	438.3	99.9,99.9
90	0.1786	0.3321	0.3571	0.3464	0.2429	0.2536	0.2429	0.2464	80- 90	0.4684	438.8	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:01 March 2021

g Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.258m [K=1.0000]
 Remarks: ZG1 BMC30F00 HEP LNTC6W500LR

LUMINANCE LIMITATION CURVES

Test:U:230.55V I:0.0307A P:6.4881W PF:0.9166 Freq:49.99Hz Lamp Flux:438.797x1 lm		
NAME: Boss 5W LED outdoor wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

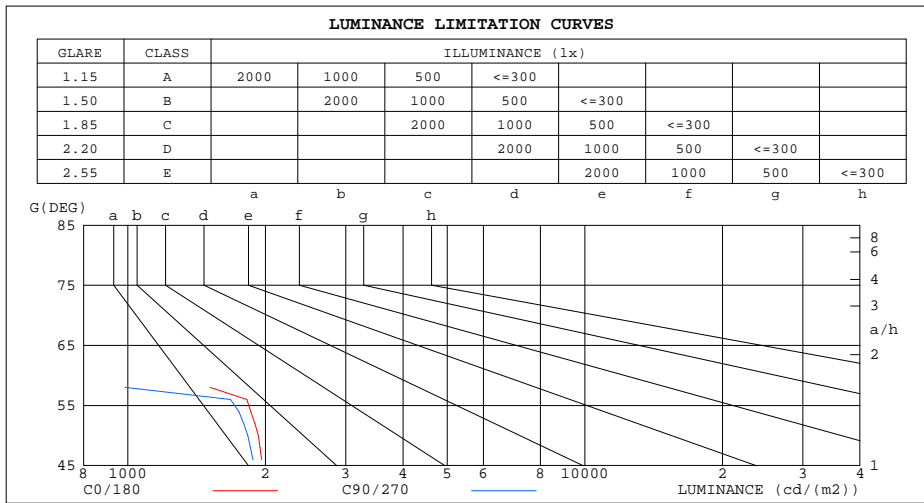

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	62	83
80	39	52
75	34	48
70	31	42
65	62	59
60	679	207
55	1905	1794
50	1931	1831
45	2009	1927


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LQL
 Test Date: 01 March 2021

G Range: 0 - 90DEG
 G Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity: 65.0%
 Test Distance: 10.258m [K=1.0000]
 Remarks: ZG1 BMC30F00 HEP LNTC6W500LR

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.55V I:0.0307A P:6.4881W PF:0.9166 Freq:49.99Hz Lamp Flux:438.797x1 lm		
NAME: Boss 5W LED outdoor wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.08	1.05	1.02	1.06	1.03	1.01	1.02	.00	.97	.98	.96	.95	.95	.93	.92	.90
2.0	.98	.92	.88	.96	.91	.87	.92	.88	.85	.89	.86	.83	.86	.84	.81	.79
3.0	.88	.81	.76	.86	.80	.75	.84	.78	.74	.81	.77	.73	.79	.75	.72	.70
4.0	.79	.72	.66	.78	.71	.66	.76	.70	.65	.73	.68	.64	.71	.67	.63	.61
5.0	.72	.64	.58	.71	.63	.58	.69	.62	.57	.67	.61	.57	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.51	.62	.56	.51	.61	.55	.51	.59	.54	.50	.48
7.0	.59	.51	.46	.59	.51	.46	.57	.50	.46	.56	.50	.45	.54	.49	.45	.43
8.0	.54	.47	.41	.54	.46	.41	.52	.46	.41	.51	.45	.41	.50	.45	.40	.39
9.0	.50	.42	.37	.49	.42	.37	.48	.42	.37	.47	.41	.37	.46	.41	.37	.35
10.0	.46	.39	.34	.46	.39	.34	.45	.38	.34	.44	.38	.34	.43	.37	.33	.32

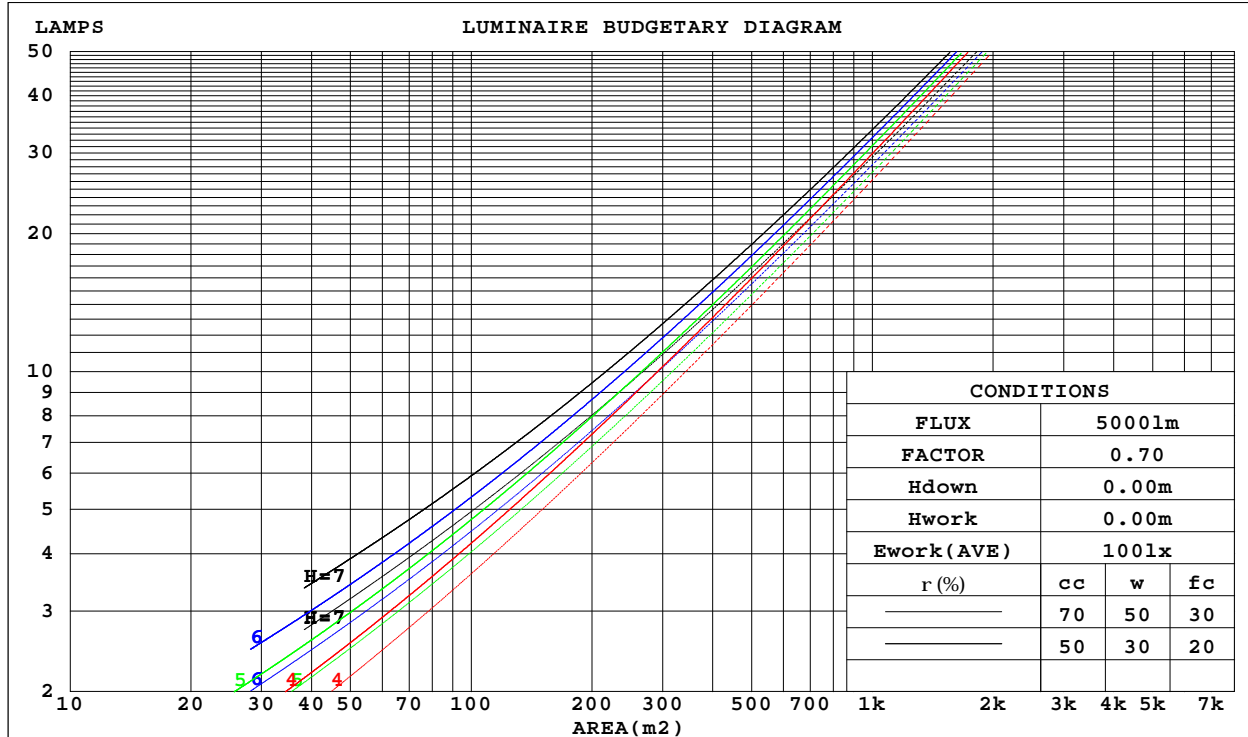

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:01 March 2021

Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.258m [K=1.0000]
 Remarks: ZG1 BMC30F00 HEP LNTC6W500LR

WEC AND CCEC

Test:U:230.55V I:0.0307A P:6.4881W PF:0.9166 Freq:49.99Hz Lamp Flux:438.797x1 lm		
NAME: Boss 5W LED outdoor wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.226	.129	.041	.220	.125	.040	.207	.119	.038	.195	.112	.036	.184	.107	.034	
2.0	.224	.123	.038	.218	.120	.037	.207	.115	.036	.196	.110	.034	.187	.106	.033	
3.0	.216	.115	.034	.211	.113	.034	.201	.109	.033	.192	.105	.032	.184	.102	.031	
4.0	.206	.107	.032	.202	.106	.031	.193	.102	.031	.185	.099	.030	.178	.097	.029	
5.0	.196	.100	.029	.192	.099	.029	.184	.096	.028	.177	.094	.028	.171	.091	.027	
6.0	.186	.093	.027	.183	.092	.027	.176	.090	.026	.169	.088	.026	.163	.086	.026	
7.0	.176	.087	.025	.173	.086	.025	.167	.085	.024	.162	.083	.024	.156	.081	.024	
8.0	.167	.082	.023	.164	.081	.023	.159	.079	.023	.154	.078	.022	.149	.077	.022	
9.0	.159	.077	.021	.156	.076	.021	.151	.075	.021	.147	.074	.021	.142	.072	.021	
10.0	.151	.072	.020	.149	.072	.020	.144	.071	.020	.140	.069	.020	.136	.068	.020	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.175	.157	.141	.149	.135	.121	.102	.093	.084	.059	.054	.049	.019	.017	.016	
2.0	.163	.132	.106	.140	.114	.092	.096	.079	.064	.055	.046	.038	.018	.015	.012	
3.0	.154	.114	.082	.132	.098	.071	.091	.068	.050	.052	.040	.029	.017	.013	.010	
4.0	.146	.100	.065	.126	.086	.056	.086	.060	.040	.050	.035	.023	.016	.011	.008	
5.0	.139	.089	.052	.120	.077	.045	.082	.054	.032	.048	.032	.019	.015	.010	.006	
6.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005	
7.0	.127	.074	.036	.109	.064	.032	.075	.045	.022	.044	.026	.013	.014	.009	.004	
8.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.011	.014	.008	.004	
9.0	.116	.063	.027	.100	.055	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.111	.059	.024	.096	.051	.021	.066	.036	.015	.039	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:01 March 2021

g Range: 0 - 90DEG
 g Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.258m [K=1.0000]
 Remarks: ZG1 BMC30F00 HEP LNTC6W500LR

UGR(Unified Glare Rating) Table

Test:U:230.55V I:0.0307A P:6.4881W PF:0.9166 Freq:49.99Hz Lamp Flux:438.797x1 lm										
NAME: Boss 5W LED outdoor wall light					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: CG LIGHTING					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.2	18.5	17.5	18.7	18.9	17.0	18.3	17.2	18.4	18.6
3H	17.0	18.2	17.3	18.5	18.7	16.8	17.9	17.0	18.2	18.4
4H	16.9	18.1	17.2	18.3	18.5	16.7	17.8	17.0	18.0	18.3
6H	16.9	17.9	17.2	18.2	18.4	16.6	17.6	16.9	17.9	18.1
8H	16.8	17.8	17.1	18.1	18.4	16.5	17.5	16.9	17.8	18.1
12H	16.8	17.7	17.1	18.0	18.3	16.5	17.4	16.8	17.7	18.0
4H 2H	17.2	18.3	17.5	18.5	18.7	16.9	18.0	17.2	18.2	18.5
3H	17.0	17.9	17.3	18.2	18.5	16.7	17.7	17.0	17.9	18.2
4H	16.9	17.7	17.2	18.0	18.4	16.6	17.5	17.0	17.8	18.1
6H	16.8	17.5	17.2	17.9	18.2	16.5	17.3	16.9	17.6	18.0
8H	16.7	17.4	17.1	17.8	18.2	16.5	17.2	16.9	17.5	17.9
12H	16.7	17.3	17.1	17.7	18.1	16.4	17.1	16.9	17.4	17.8
8H 4H	16.7	17.4	17.1	17.8	18.2	16.5	17.2	16.9	17.5	17.9
6H	16.6	17.2	17.1	17.6	18.0	16.4	17.0	16.8	17.4	17.8
8H	16.6	17.1	17.1	17.5	18.0	16.4	16.8	16.8	17.3	17.7
12H	16.6	17.0	17.0	17.4	17.9	16.3	16.7	16.8	17.2	17.7
12H 4H	16.7	17.3	17.1	17.7	18.1	16.4	17.1	16.9	17.4	17.8
6H	16.6	17.1	17.1	17.5	18.0	16.4	16.8	16.8	17.3	17.7
8H	16.6	17.0	17.0	17.4	17.9	16.3	16.7	16.8	17.2	17.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.7 / - 1.0					+ 0.5 / - 0.6				
1.5H	+ 1.7 / - 2.1					+ 1.9 / - 2.0				
2.0H	+ 3.0 / -18.3					+ 2.6 / -17.1				

CIE Pub.117, 438.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.9)

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:01 March 2021

g Range: 0 - 90DEG
 g Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.258m [K=1.0000]
 Remarks: ZG1 BMC30F00 HEP LNTC6W500LR

UTILIZATION FACTORS TABLE

Test:U:230.55V I:0.0307A P:6.4881W PF:0.9166 Freq:49.99Hz Lamp Flux:438.797x1 lm		
NAME: Boss 5W LED outdoor wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	65	54	48	64	54	48	63	54	48	42
0.80	76	66	60	75	66	60	73	65	59	53
1.00	85	76	71	84	76	70	82	77	70	64
1.25	92	84	79	91	84	78	89	82	78	72
1.50	97	89	84	95	88	84	93	87	82	76
2.00	102	96	91	101	95	91	98	93	89	83
2.50	105	99	95	103	98	94	100	95	92	85
3.00	107	102	98	105	101	97	102	98	95	88
4.00	110	106	102	108	104	101	104	101	98	90
5.00	111	108	105	109	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:01 March 2021

g Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.258m [K=1.0000]
 Remarks: ZG1 BMC30F00 HEP LNTC6W500LR

ISOCANDELA DIAGRAM

Test:U:230.55V I:0.0307A P:6.4881W PF:0.9166 Freq:49.99Hz Lamp Flux:438.797x1 lm		
NAME: Boss 5W LED outdoor wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

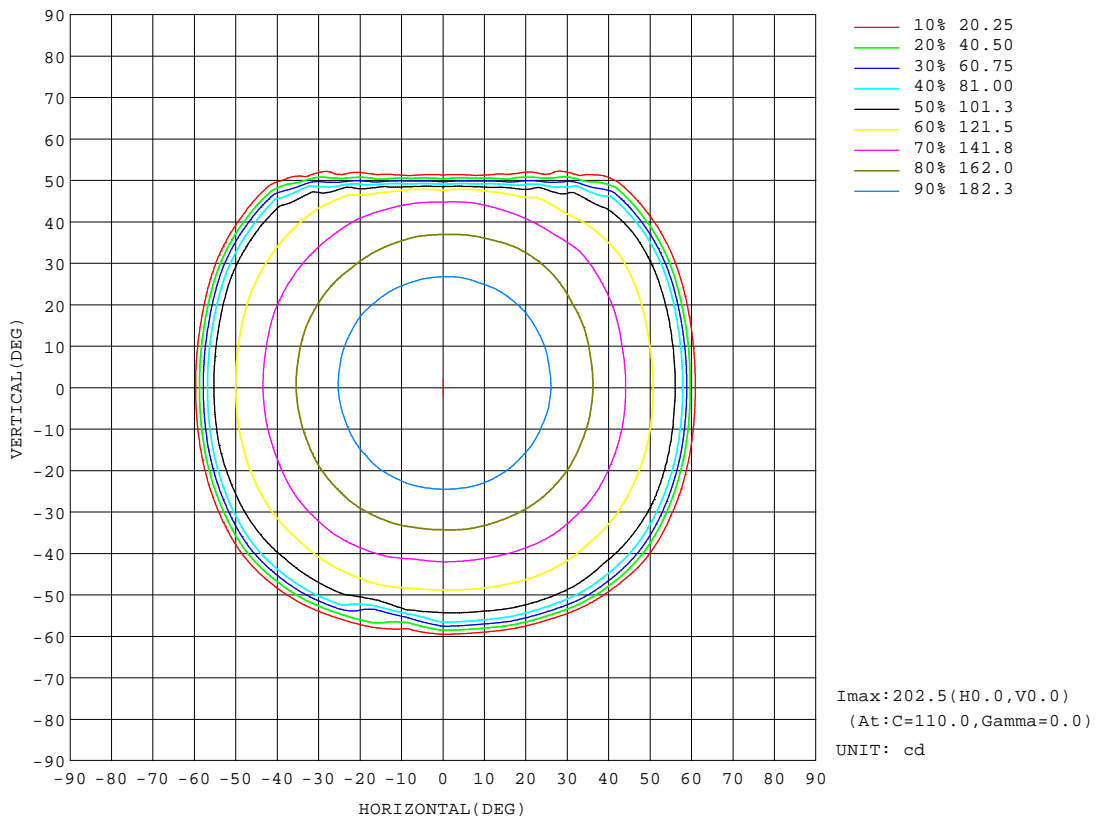


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:01 March 2021

Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.258m [K=1.0000]
 Remarks: ZG1 BMC30F00 HEP LNTC6W500LR

AAI CURVES

Test:U:230.55V I:0.0307A P:6.4881W PF:0.9166 Freq:49.99Hz Lamp Flux:438.797x1 lm		
NAME: Boss 5W LED outdoor wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

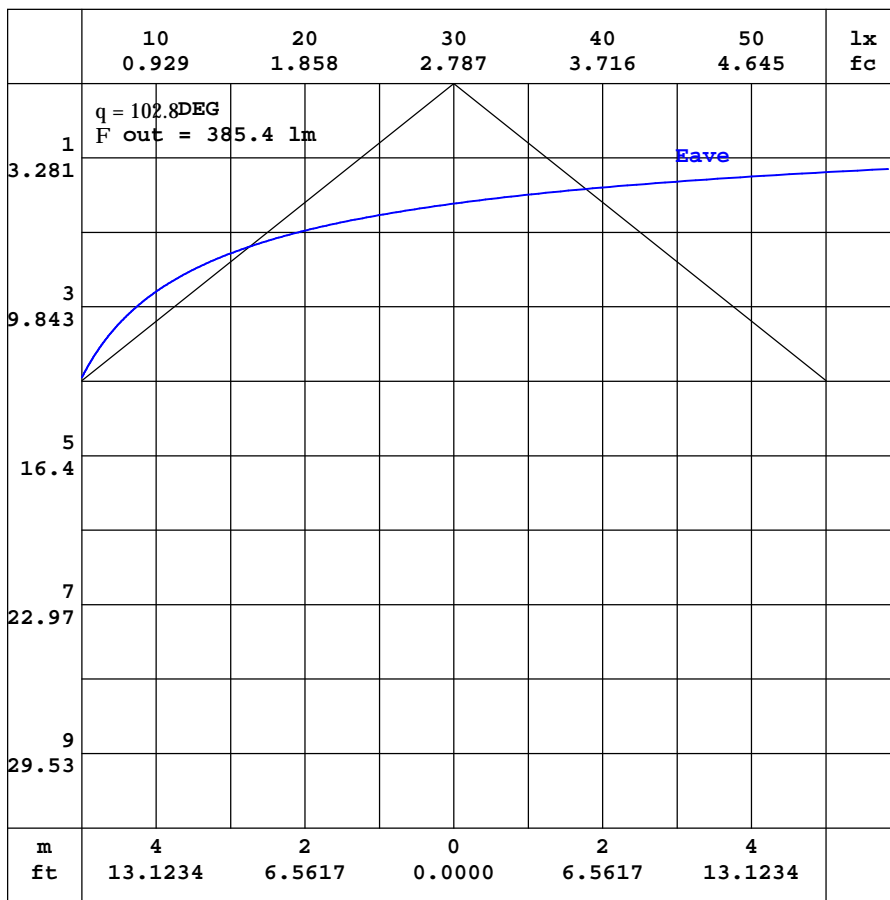


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:01 March 2021

Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.258m [K=1.0000]
 Remarks: ZG1 BMC30F00 HEP LNTC6W500LR

ISOLUX DIAGRAM

Test:U:230.55V I:0.0307A P:6.4881W PF:0.9166 Freq:49.99Hz Lamp Flux:438.797x1 lm		
NAME: Boss 5W LED outdoor wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

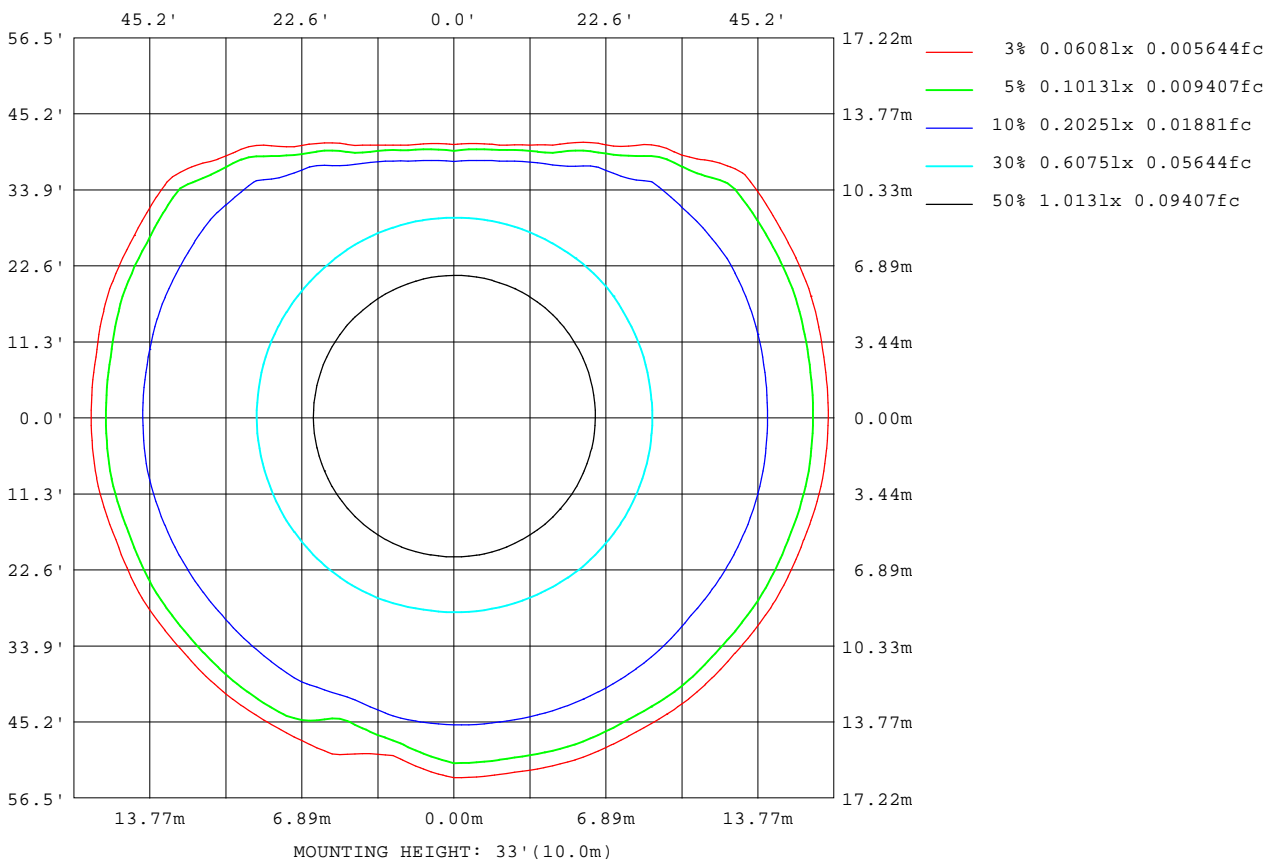

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LQL
 Test Date: 01 March 2021

Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity: 65.0%
 Test Distance: 10.258m [K=1.0000]
 Remarks: ZG1 BMC30F00 HEP LNTC6W500LR

LED Avg.L Report

Test:U:230.55V I:0.0307A P:6.4881W PF:0.9166 Freq:49.99Hz Lamp Flux:438.797x1 lm		
NAME: Boss 5W LED outdoor wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	39
L_0~180(75)av	31
L_0~180(85)av	51
L_90~270(65)av	37
L_90~270(75)av	33
L_90~270(85)av	44
L_45(65)av	41
L_45(75)av	32
L_45(85)av	51

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:01 March 2021

g Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.258m [K=1.0000]
 Remarks: ZG1 BMC30F00 HEP LNTC6W500LR

Planar Illuminance Curve

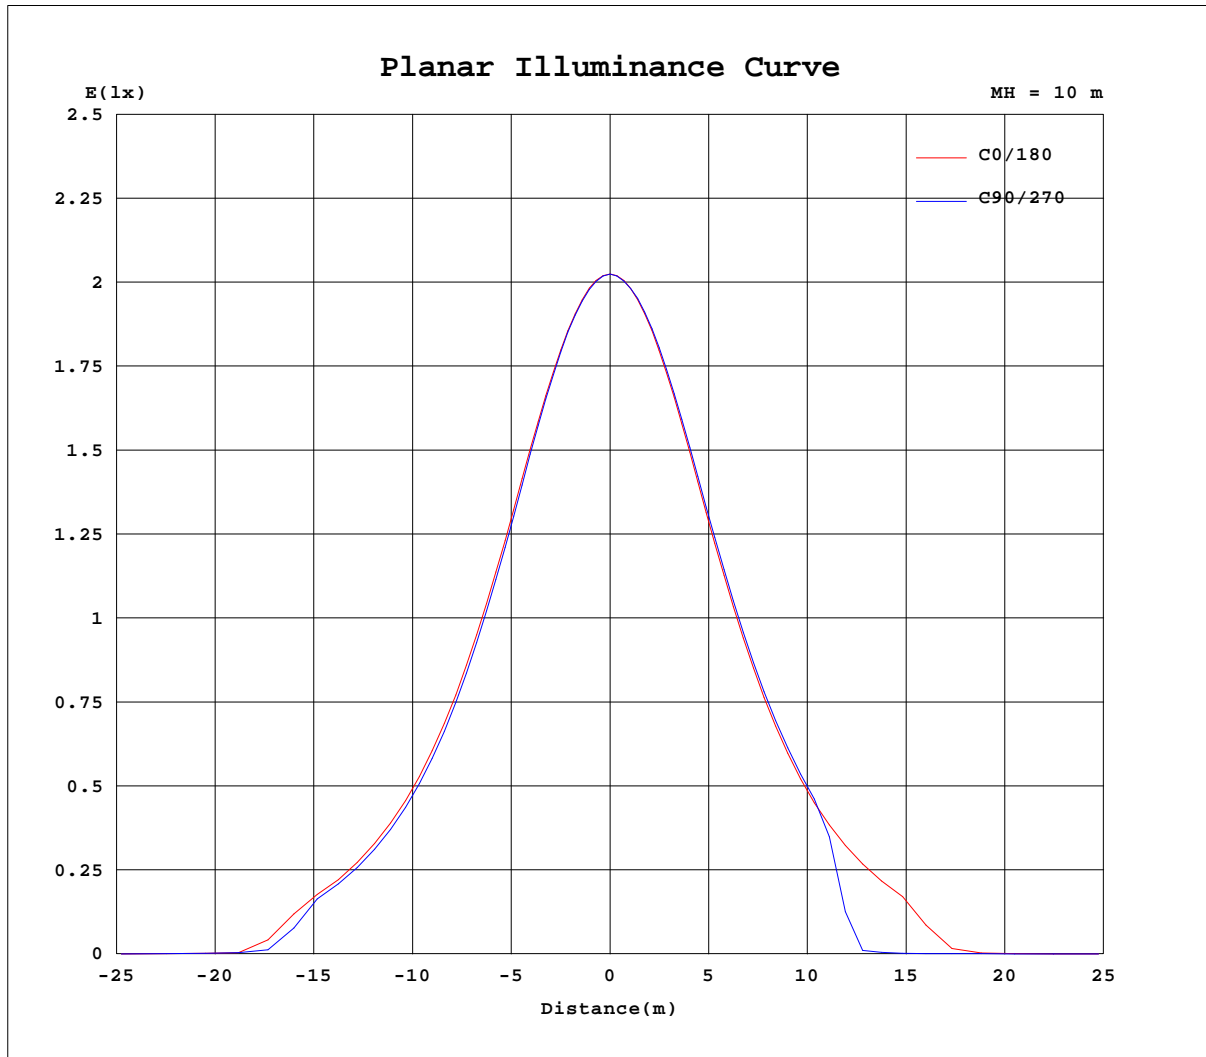

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LQL
 Test Date: 01 March 2021

Page Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity: 65.0%
 Test Distance: 10.258m [K=1.0000]
 Remarks: ZG1 BMC30F00 HEP LNTC6W500LR

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.55V I:0.0307A P:6.4881W PF:0.9166 Freq:49.99Hz Lamp Flux:438.797x1 lm		
NAME: Boss 5W LED outdoor wall light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: CG LIGHTING	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C(DEG) g (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	202	202	202	202	202	202	202	202	202	202	203	202	202	202	202	202	202		
5	202	202	202	202	202	202	202	202	202	202	202	202	202	202	202	202	202		
10	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200		
15	197	197	197	197	197	198	198	198	198	198	198	198	198	197	197	197	197		
20	190	191	191	191	191	192	192	192	192	192	192	192	192	192	191	191	191		
25	185	185	185	186	186	186	186	186	187	187	187	187	186	186	186	186	186		
30	174	174	175	175	175	175	175	176	176	177	176	177	177	176	176	176	176		
35	165	166	166	166	166	167	167	168	168	169	169	169	169	169	168	168	168		
40	151	152	152	152	152	154	154	155	155	155	155	157	157	156	154	154	153		
45	140	142	141	142	142	144	144	144	144	145	144	144	144	146	144	144	142		
50	122	123	123	124	125	125	107	66.6	47.6	67.1	104	122	121	124	126	125	124		
55	108	109	109	110	110	50.2	4.14	3.05	2.47	3.16	4.83	51.8	108	108	112	112	110		
60	14.3	20.8	21.3	27.6	3.10	1.42	1.24	1.14	1.14	1.13	1.22	1.46	4.24	44.0	39.7	40.2	34.8		
65	1.73	1.93	2.08	2.09	1.24	1.01	1.05	0.99	1.04	0.99	1.04	1.00	1.22	3.05	2.93	2.78	2.61		
70	0.97	0.91	0.99	0.90	0.86	0.79	0.84	0.80	0.83	0.79	0.82	0.79	0.84	0.90	1.07	0.99	1.04		
75	0.85	0.79	0.81	0.69	0.69	0.57	0.64	0.54	0.61	0.56	0.64	0.58	0.68	0.67	0.83	0.78	0.86		
80	0.64	0.56	0.52	0.38	0.32	0.18	0.13	0.12	0.12	0.12	0.14	0.19	0.34	0.36	0.51	0.53	0.63		
85	0.52	0.46	0.44	0.35	0.26	0.19	0.12	0.16	0.11	0.16	0.12	0.17	0.25	0.34	0.44	0.46	0.54		
90	0.24	0.22	0.24	0.25	0.26	0.26	0.24	0.24	0.24	0.26	0.24	0.25	0.24	0.25	0.26	0.25	0.23		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LQL
 Test Date:01 March 2021

g Range: 0 - 90DEG
 Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.403
 Humidity:65.0%
 Test Distance:10.258m [K=1.0000]
 Remarks: ZG1 BMC30F00 HEP LNTC6W500LR